

| | | |
|--|------------------------|--|
| LOC/DME I-RDM 109.1 Chan 28 | APP CRS 226° | Rwy Ldg TDZE Apt Elev 7031 3067 3082 |
|--|------------------------|--|

ILS or LOC RWY 23

ROBERTS FLD (RDM)


DME required. RADAR required for procedure entry at FLUSS.

⚠ Autopilot coupled approach NA below 4370. VDP NA when using BDN altimeter setting. For inop ALS, increase S-ILS 23* Cat E visibility to 3/8 SM, S-ILS 23 Cat E visibility to 1 SM, and S-LOC 23 Cat C/D/E visibility to 1 SM. For inop ALS when using BDN altimeter setting, increase S-ILS 23* Cats D/E visibility to 7/8 SM, S-ILS 23 Cats A/B/C to 7/8 SM, Cat D to 1 SM, Cat E to 1 1/8 SM; and increase S-LOC 23 Cats C/D/E visibility to 1 3/8 SM. When local altimeter setting not received, use BDN altimeter setting and increase ILS 23* DA to 3348 feet; increase S-ILS 23 DA to 3473 feet and visibility Cat E 1/2 SM. Increase all MDAs 100 feet and S-LOC 23 visibility Cat C/D/E 3/8 SM, and Circling visibility Cat C/D/E 1/2 SM.


MALSRS **AS**

MISSED APPROACH: Climb to 3700 then climbing right turn to 7000 on heading 320° and on DSD VORTAC R-348 to CUPRI/DSD 22 DME and hold.
*Missed approach requires minimum climb of 223 feet per NM to 4860 for Category D/E aircraft.

| | | | | |
|------------------------|---|--|-------------------------|-------------------------|
| ATIS 119.025 | SEATTLE CENTER 126.15 269.475 | REDMOND TOWER* 124.5 (CTAF) 256.8 | GND CON 121.8 | UNICOM 122.95 |
|------------------------|---|--|-------------------------|-------------------------|

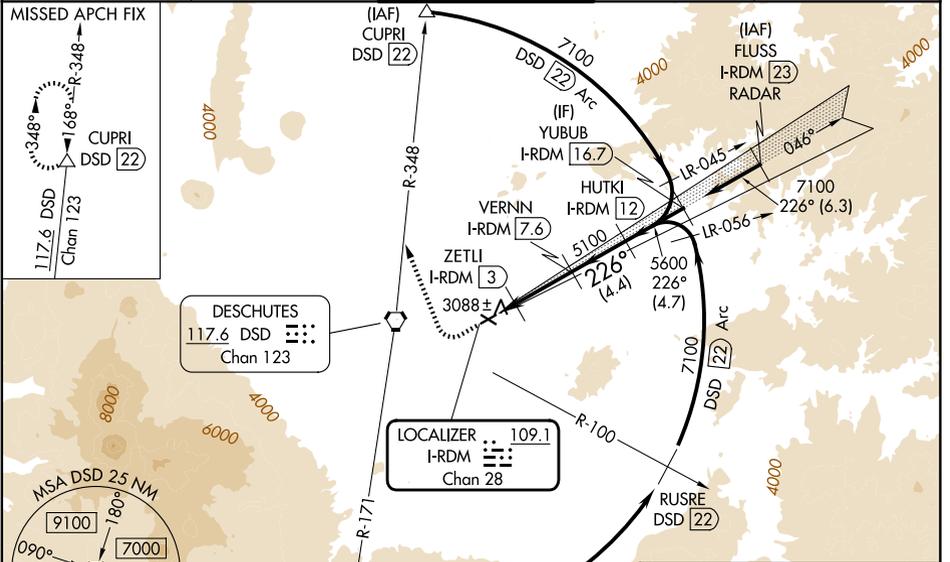

| | |
|-----------|-----------|
| ELEV 3082 | TDZE 3067 |
|-----------|-----------|

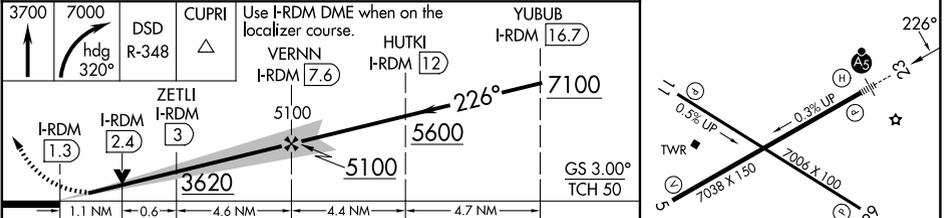

| CATEGORY | A | B | C | D | E |
|-----------|------------------------|-----------------------|-------------------------------|-------------------------------|-------------------------------|
| S-ILS 23* | NA | | | 3267-1/2 | 200 (200-1/2) |
| S-ILS 23 | 3267-1/2 200 (200-1/2) | | | 3321-1/2 254 (300-1/2) | 3392-1/2 325 (400-1/2) |
| S-LOC 23 | 3440-1/2 373 (400-1/2) | | 3440-5/8 373 (400-5/8) | | |
| CIRCLING | 3540-1 458 (500-1) | 3560-1 478 (500-1) | 3660-1 1/2 578 (600-1 1/2) | 3760-2 1/4 678 (700-2 1/4) | 3840-2 3/4 758 (800-2 3/4) |

REIL Rwy 5, 11, and 29
HIRL Rwy 5-23
MIRL Rwy 11-29

NW-1, 19 FEB 2026 to 19 MAR 2026

NW-1, 19 FEB 2026 to 19 MAR 2026