

LOC/DME I-RNO 110.9 Chan 46	APP CRS 167°	Rwy Ldg TDZE 10001 4415 Apt Elev 4415
---	------------------------	--

ILS Y RWY 17R

RENO/TAHOE INTL (RNO)


DME required.

Inop table does not apply.
† For inop ALS, increase S-ILS
-13°C 17R visibility to 1 1/2 SM.

MALS R

MISSED APPROACH: Climb to 6300 then climbing left turn to 11000 direct FMG VORTAC and on FMG VORTAC R-017 to NICER INT/FMG 13.5 DME and hold, continue climb-in-hold to 11000.
* Missed approach requires minimum climb of 350 feet per NM to 8000.
** Missed approach requires minimum climb of 275 feet per NM to 8000.

D-ATIS 135.8 363.0	NORCAL APP CON 119.2 279.55 126.3 353.9	RENO TOWER 118.7 257.8	GND CON 121.9 348.6
------------------------------	---	----------------------------------	-------------------------------

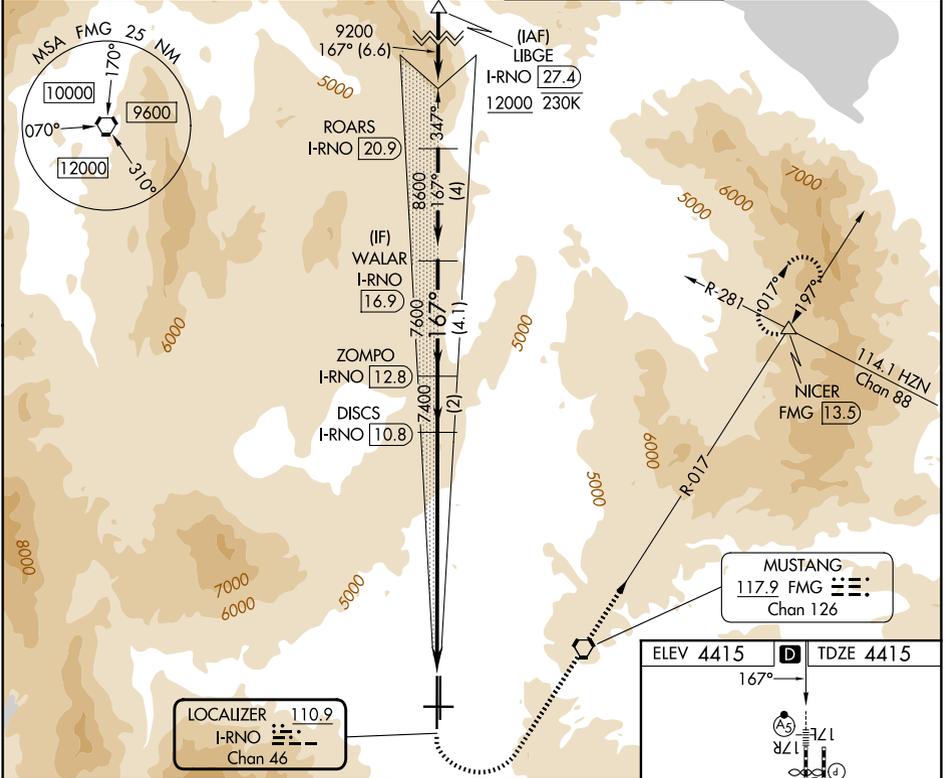

SW-4, 19 FEB 2026 to 19 MAR 2026

SW-4, 19 FEB 2026 to 19 MAR 2026

6300	11000	FMG	NICER	ZOMPO	WALAR
↑	↖	◻	△	I-RNO [12.8]	I-RNO [16.9]
VGSI and ILS glidepath not coincident (VGSI Angle 3.06/TCH 77).		FMG R-017		DISCS I-RNO [10.8]	
				7400	8600
				7400	7600
					GS 3.10° TCH 59
				8.9 NM	2 NM
					4.1 NM
CATEGORY	A	B	C	D	E
S-ILS 17R *†		4915/50	500 (500-1)		
S-ILS 17R **#		5415-4	1000 (1000-4)		
S-ILS 17R #		5915-5	1500 (1500-5)		

