

RNAV (RNP) Z RWY 17L

RENO/TAHOE INTL (RNO)



APP CRS	Rwy Ldg	9000
167°	TDZE	4415
	Apt Elev	4415

RNP AR APCH - GPS.



For uncompensated Baro-VNAV systems, procedure NA below -9°C or above 54°C.

MISSED APPROACH: Climb to 13000 on track 167° to ZIDGO and on track 184° to USINE and on track 127° to YARKU and hold, continue climb-in-hold to 13000.
 # Missed approach requires minimum climb of 203 feet per NM to 5040.
 * Missed approach requires minimum climb of 264 feet per NM to 7260.

D-ATIS 135.8 363.0	NORCAL APP CON 119.2 279.55 126.3 353.9	RENO TOWER 118.7 257.8	GND CON 121.9 348.6
------------------------------	---	----------------------------------	-------------------------------

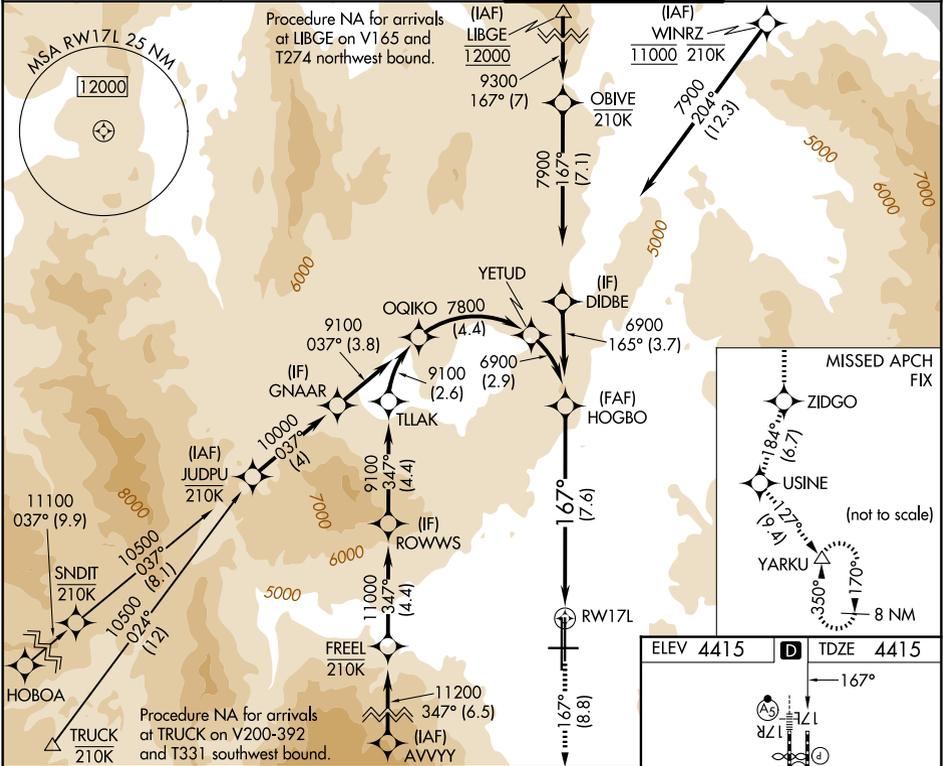

ELEV 4415	TDZE 4415
-----------	-----------

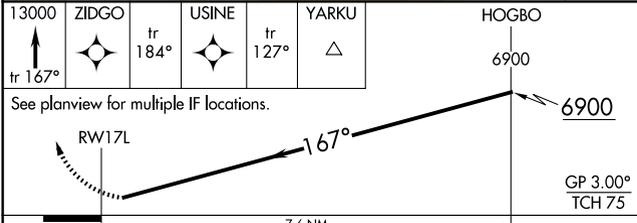

CATEGORY	A	B	C	D
RNP 0.12 DA*		4754-1	339 (400-1)	
RNP 0.17 DA#		5017-1 ³ / ₄	602 (700-1 ³ / ₄)	
RNP 0.30 DA		5067-1 ⁷ / ₈	652 (700-1 ⁷ / ₈)	

MIRL Rwy 8-26
 REIL Rwy 8, 17L, 26, and 35R
 HIRL Rwy 17R-35L and 17L-35R

AUTHORIZATION REQUIRED

SW-4, 19 FEB 2026 to 19 MAR 2026

SW-4, 19 FEB 2026 to 19 MAR 2026