


| | | |
|---------------------------|------------------------|-------------------------|
| LOC I-ROA 109.7 | APP CRS 336° | Rwy Ldg 5810 |
| | | TDZE 1160 |
| | | Apt Elev 1175 |

ILS or LOC RWY 34

ROANOKE/BLACKSBURG RGNL (WOODRUM FLD) (R.O.A)



| | | | |
|--|--|-----------|---|
| DME required for procedure entry. ADF or RADAR required. | | MALSR | MISSED APPROACH: Climb to 2300 then climbing left turn to 4500 direct VIT NDB and hold. Continue climb-in-hold to 4500. # Missed approach requires minimum climb of 425 feet perNM to 3700. |
| | For inop ALS, increase S-ILS 34 # all Cats to within 1 3/8 SM. Circling NA northwest of Rwy 6-24. -12°C Inop table does not apply to S-ILS 34 all Cats. | | |

| | | | |
|------------------------|---|-------------------------------------|-------------------------------|
| ATIS 132.375 | ROANOKE APP CON 133.225 339.8 | ROANOKE TOWER 118.3 257.8 | GND CON 121.9 257.8 |
|------------------------|---|-------------------------------------|-------------------------------|

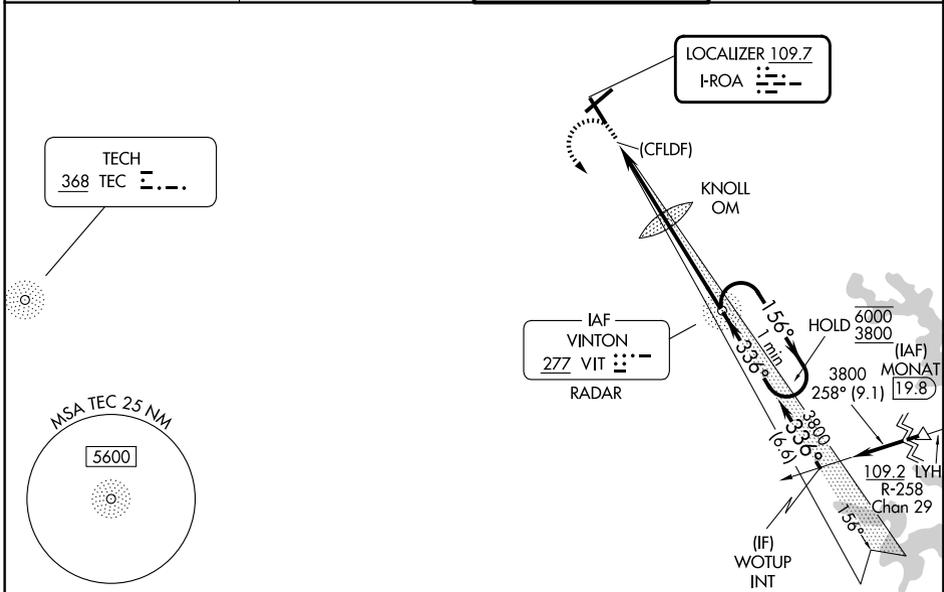

NE-3, 19 FEB 2026 to 19 MAR 2026

NE-3, 19 FEB 2026 to 19 MAR 2026

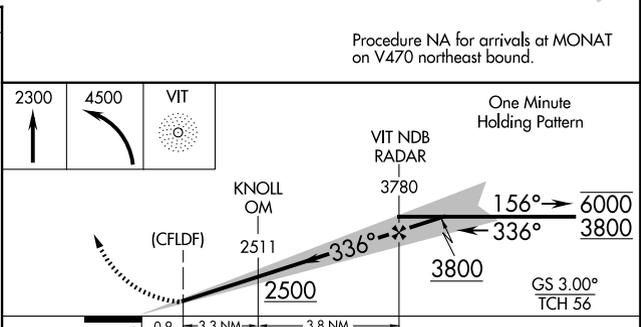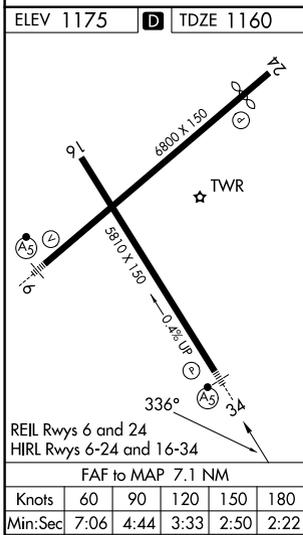

| CATEGORY | A | B | C | D |
|------------|--------------------------------|--------------------------------|--------------------------------|-------------------------|
| S-ILS 34 # | | 1603-7/8 | 443 (500-7%) | |
| S-ILS 34 | | 2040-4 | 880 (900-4) | |
| S-LOC 34 | 2140-3/4 980 (1000-3/4) | 2140-1 980 (1000-1) | 2140-2 1/2 980 (1000-2 1/2) | |
| CIRCLING | 2140-1 1/4 965 (1000-1 1/4) | 2140-1 1/2 965 (1000-1 1/2) | 2460-3 1285 (1300-3) | 2800-3 1625 (1700-3) |

ROANOKE, VIRGINIA
Amdt 15 05SEP24

ROANOKE/BLACKSBURG RGNL (WOODRUM FLD) (R.O.A)
37°20'N-79°59'W
ILS or LOC RWY 34