

| | | | |
|--|------------------------|---|-------------|
| WAAS CH 65835 W31A | APP CRS 312° | Rwy Ldg TDZE 812 Apt Elev 827 | 4797 |
|--|------------------------|---|-------------|

RNAV (GPS) RWY 31


ROSECRANS MEML (STJ)

▽ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Kansas City Intl altimeter setting. Straight-In minimums NA at night. When local altimeter setting not received, use Kansas City Intl altimeter setting and increase all DA 97 feet and increase LPV visibility 1/8 mile and LNAV/VNAV visibility 3/8 mile all Cats; increase all MDA 100 feet and LNAV Cat C and D visibility 1/4 mile, and Circling Cat C 1/2 mile, Cat D 1/4 mile.



▲ ASR/PAR

MISSED APPROACH:
Climb to 3100 direct OVEGE and hold.

| | | | | |
|-----------------------|---|--|-------------------------|-------------------------|
| ATIS 125.05 | ST. JOSEPH APP CON ★ 120.35 360.8 | ST. JOSEPH TOWER ★ 126.9(CTAF) 239.0 | GND CON 121.9 | UNICOM 122.95 |
|-----------------------|---|--|-------------------------|-------------------------|

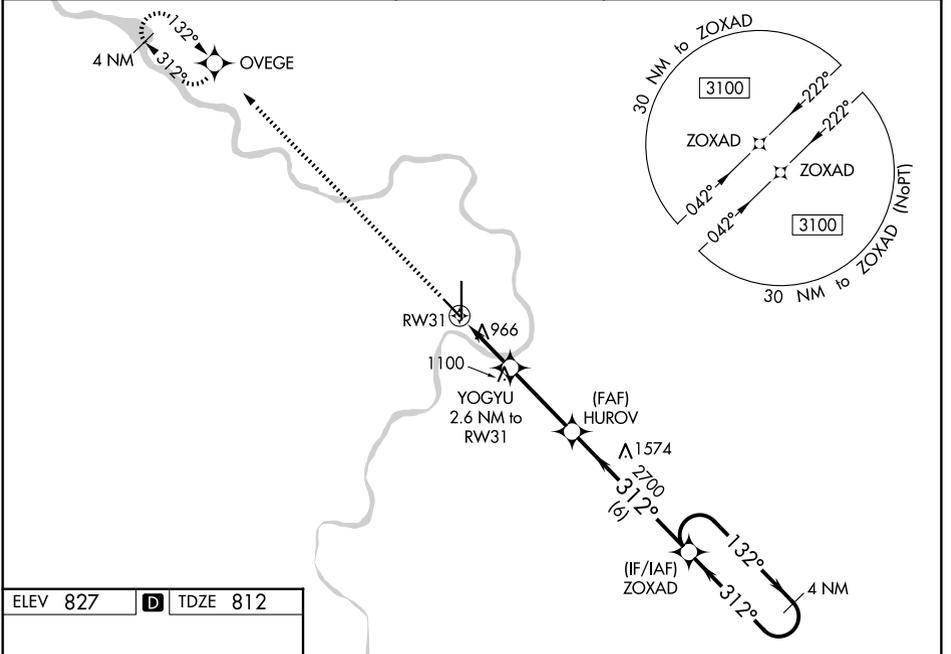

| | | |
|----------|----------|----------|
| ELEV 827 | D | TDZE 812 |
|----------|----------|----------|

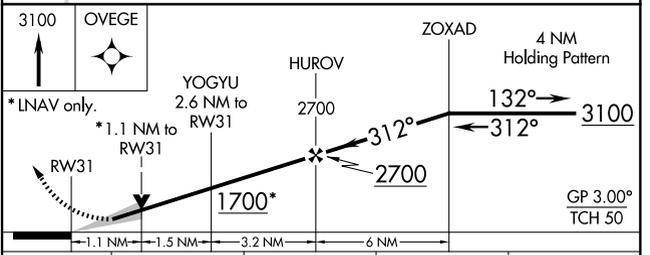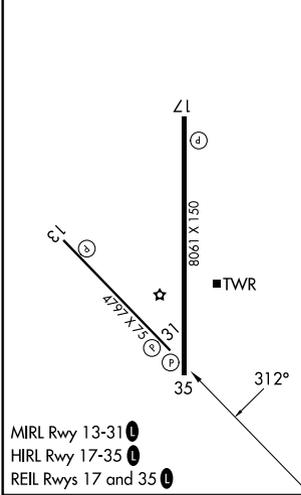

| CATEGORY | A | B | C | D |
|--------------|-----------------------|-----------------------|-------------------------|-------------------------|
| LPV DA | 1062-1 | | 250 (300-1) | |
| LNAV/VNAV DA | 1255-1½ | | 443 (500-1½) | |
| LNAV MDA | 1220-1 408 (400-1) | | 1220-1½ 408 (400-1½) | |
| CIRCLING | 1400-1 573 (600-1) | 1420-1 593 (600-1) | 1620-2¼ 793 (800-2¼) | 1640-2¾ 813 (900-2¾) |

NC-3, 19 FEB 2026 to 19 MAR 2026

NC-3, 19 FEB 2026 to 19 MAR 2026