


WAAS CH 73000 W30A	APP CRS 303°	Rwy Ldg TDZE Apt Elev	9013 605 617
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 30R

ST LOUIS LAMBERT INTL (STL)

RNP APCH - GPS.		ALSF-2 	MISSED APPROACH: Climb to 3000 direct IDLOC and on track 025° to FASHE and hold.
RADAR required for procedure entry.			
<p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. Simultaneous approach authorized with Rwy 29. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 4500, LNAV Cat C/D/E visibility to RVR 6000.</p>			

D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 120.05 284.6	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)	CLNC DEL 119.5 363.1	CPDLC
--	---	--	---	--------------------------------	-------

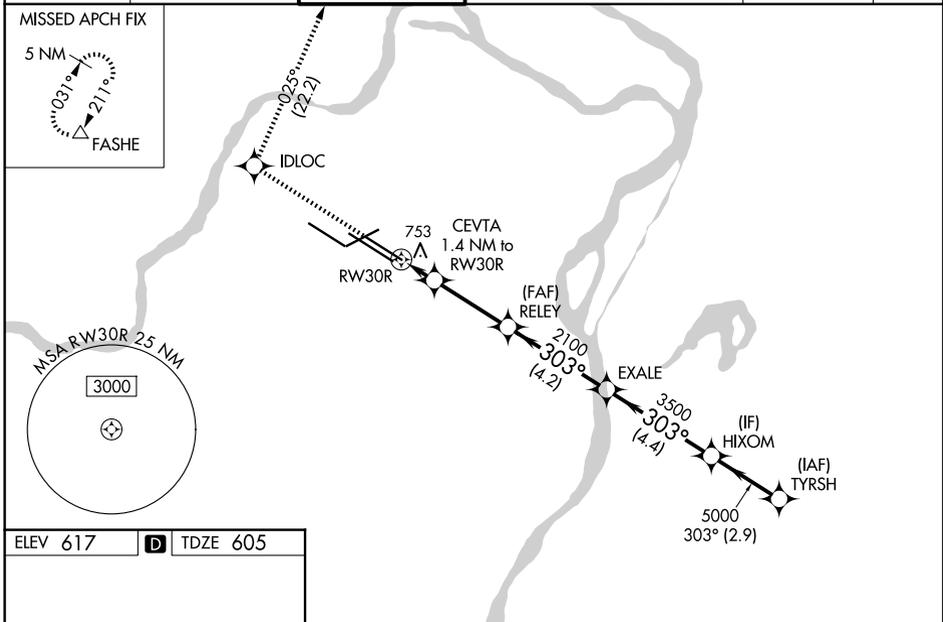

ELEV 617	D	TDZE 605						
Rwy 6-24 7603 X 150 Rwy 11-29 9000 X 150 Rwy 12L-30R 9013 X 150 Rwy 12R-30L 11020 X 150			3000	IDLOC	FASHE			
			↑	tr 025°	△	HIXOM	TYRSH	
RWY30R CEVTA 1.4 NM to RWY30R RELEY 2100 EXALE 3500 HIXOM 5000 TYRSH 5000			1100	2100	3500	5000	GP 3.00° TCH 57	
			1.4	3.1 NM	4.2 NM	4.4 NM	2.9 NM	
			CATEGORY	A	B	C	D	E
LPV DA			805/18 200 (200-½)					
LNAV/VNAV DA			914/24 309 (300-½)					
LNAV MDA			1020/24 415 (500-½)		1020/40 415 (500-¾)			