




| | | |
|---|------------------------|--|
| LOC/DME I-UAT 111.9 Chan 56 | APP CRS 164° | Rwy Ldg 12000 TDZE 4226 Apt Elev 4231 |
|---|------------------------|--|

ILS or LOC RWY 16R

SALT LAKE CITY INTL (SLC)

| | | | |
|---|--|------------|---|
| RNP APCH - GPS. From EKKHO or WEBER. | | ALSF-2 | MISSED APPROACH: Climb to 4800 then climbing right turn to 8100 on heading 310° and on TCH VORTAC R-249 to STACO INT/TCH 20 DME and hold. |
| DME or RADAR required. | | | |
| <p>Simultaneous approach authorized. For inop ALS, increase S-LOC 16R Cat A and B visibilities to RVR 5500, and Cat C and D visibilities to 1 3/8 SM.</p> | | | |

| | | | | | |
|---------------------------------|--|---|---------------------------------|----------------------------------|-------|
| D-ATIS 124.75 125.625 | SALT LAKE CITY APP CON 125.7 284.6 | SALT LAKE CITY TOWER 132.65 336.4 | GND CON 123.775 348.6 | CLNC DEL 127.3 379.975 | CPDLC |
|---------------------------------|--|---|---------------------------------|----------------------------------|-------|

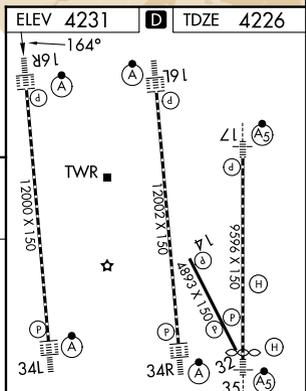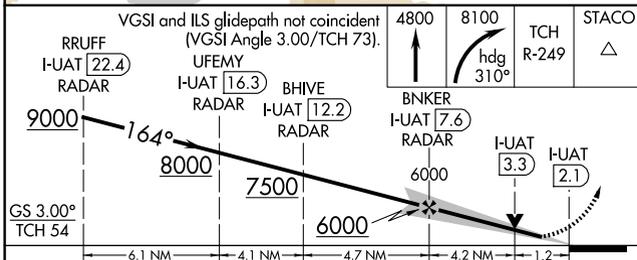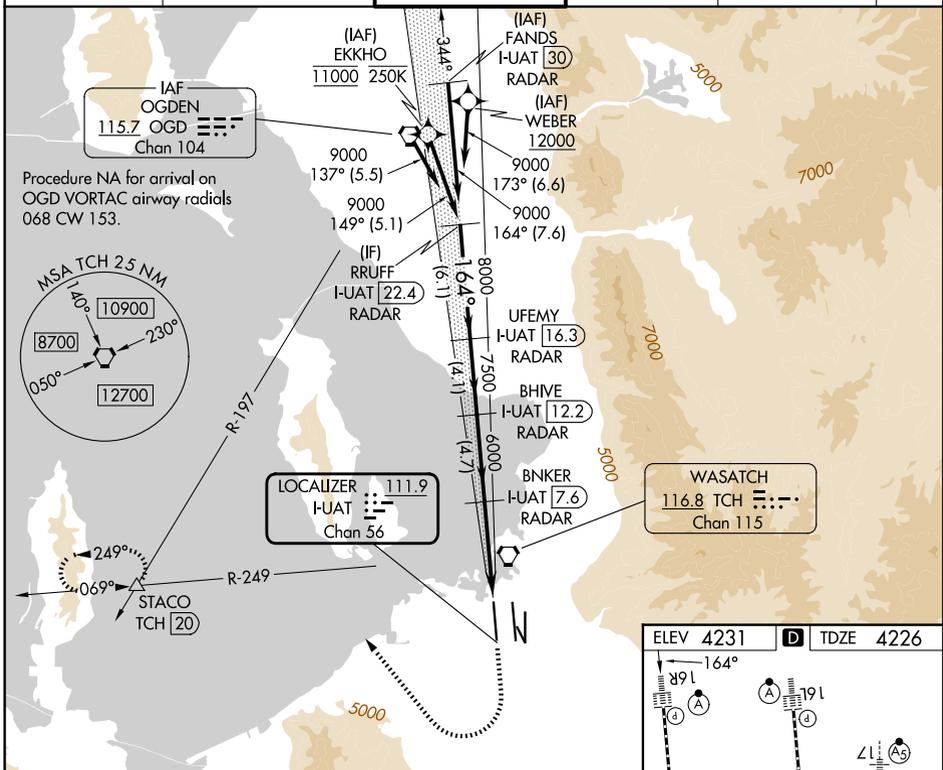

| | | | | |
|-----------|---------|---------------|---------------|---------------|
| CATEGORY | A | B | C | D |
| S-ILS 16R | 4426/18 | | 200 (200-1/2) | |
| S-LOC 16R | 4680/24 | 454 (500-1/2) | 4680/45 | 454 (500-7/8) |

| | | | | | |
|--|------|------|------|------|------|
| HIRL all Rwys | | | | | |
| TDZ/CL Rwys 16L, 16R, 17, 34L, 34R, and 35 | | | | | |
| FAF to MAP 5.4 NM | | | | | |
| Knots | 60 | 90 | 120 | 150 | 180 |
| Min:Sec | 5:24 | 3:36 | 2:42 | 2:10 | 1:48 |

SW-4, 19 FEB 2026 to 19 MAR 2026

SW-4, 19 FEB 2026 to 19 MAR 2026