
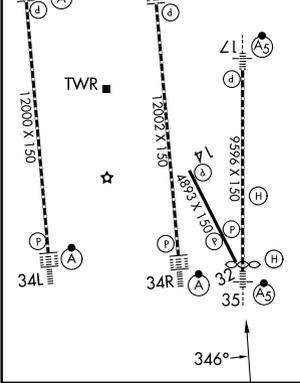


APP CRS	Rwy Ldg	<b>9272</b>
<b>346°</b>	TDZE	<b>4227</b>
	Apt Elev	<b>4231</b>

# RNAV (RNP) Z RWY 35

SALT LAKE CITY INTL (SLC)

RNP AR APCH - GPS.		MALSR	MISSED APPROACH: Climb to 9000 direct KNOBY and on track 334° to OGD VORTAC and hold.					
<p>▼ For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 54°C. For inop ALS, increase RNP 0.20 all Cats visibility to RVR 4500.</p>			D-ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER	GND CON	CLNC DEL	CPDLC
			<b>124.75 125.625</b>	<b>125.7 284.6</b>	<b>118.3 257.8</b>	<b>121.9 348.6</b>	<b>127.3 379.975</b>	

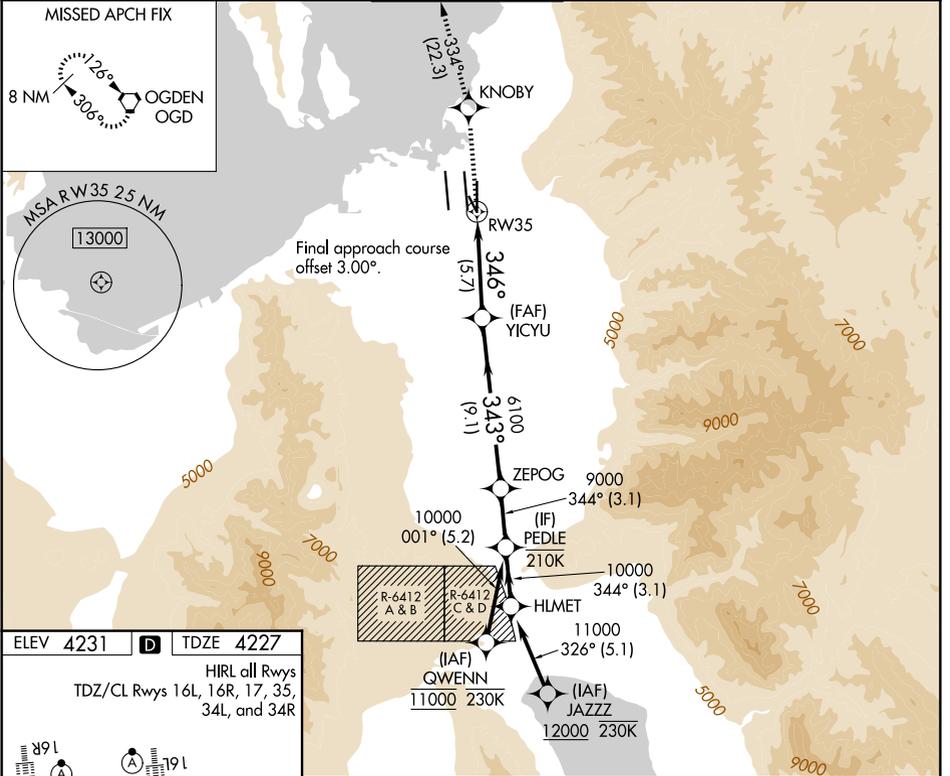

9000	KNOBY	tr 334°	OGD	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 74).	HMLET
					PEDLE
					11000
					10000
					9000
					6100
					346°
					343°
					344°
					344°
					GP 3.00°
					TCH 55
					5.7 NM
					9.1 NM
					3.1 NM
					3.1 NM
CATEGORY	A	B	C	D	E
RNP 0.20 DA		4502/24	275 (300-½)		
RNP 0.30 DA		4625/35	398 (400-¾)		
<b>AUTHORIZATION REQUIRED</b>					

SW-4, 19 FEB 2026 to 19 MAR 2026

SW-4, 19 FEB 2026 to 19 MAR 2026