


ALISS SEVEN DEPARTURE (RNAV)

SC-3, 19 FEB 2026 to 19 MAR 2026

TOP ALTITUDE:
5000

RNAV 1 - DME/DME/IRU or GPS.
RADAR required for non-GPS equipped aircraft.
RADAR required.

SAN ANTONIO DEP CON
125.1 307.0 (31L/R)
125.7 290.225 (13L/R, 22)
127.1 269.1 (4)
D-ATIS
118.9
CLNC DEL
126.7
CPDLC
GND CON
121.9 348.6
SAN ANTONIO TOWER
119.8 257.8

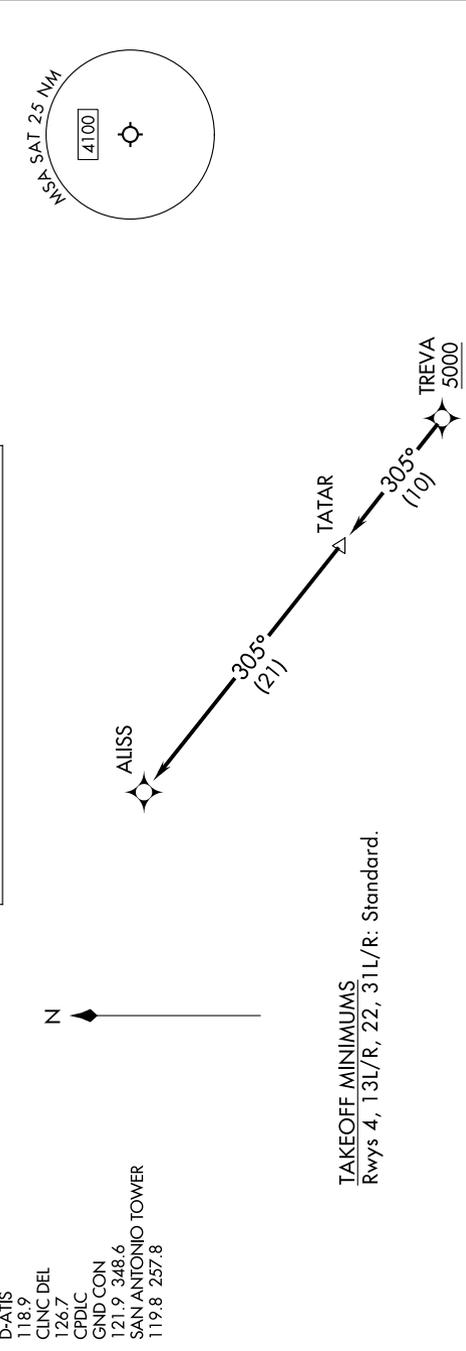

TAKEOFF MINIMUMS
Rwys 4, 13L/R, 22, 31L/R: Standard.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 4: Climb on heading 037° or as assigned by ATC, for vectors to TREVA, thence. . . .

TAKEOFF RUNWAYS 13L/R: Climb on heading 128° or as assigned by ATC, for vectors to TREVA, thence. . . .

TAKEOFF RUNWAY 22: Climb on heading 217° or as assigned by ATC, for vectors to TREVA, thence. . . .

TAKEOFF RUNWAYS 31L/R: Climb on heading 308° or as assigned by ATC, for vectors to TREVA, thence. . . .

. . . on track 305° to TATAR, then on track 305° to ALISS. Maintain 5000. Expect filed altitude 10 minutes after departure.

NOTE: Chart not to scale.

ALISS SEVEN DEPARTURE (RNAV)

SC-3, 19 FEB 2026 to 19 MAR 2026