

RNAV (RNP) Z RWY 31L

SAN ANTONIO INTL (SAT)

APP CRS	Rwy Ldg	8502
308°	TDZE	790
	Apt Elev	809


RNP AR APCH - GPS.

▼ For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 5500, increase RNP 0.30 all Cats visibility to RVR 6000.




MISSED APPROACH: Climb to 4200 direct HASDO and track 307° to REUBE and hold.


D-ATIS 118.9	SAN ANTONIO APP CON 125.1 307.0	SAN ANTONIO TOWER 119.8 257.8	GND CON 121.9 348.6
------------------------	---	---	-------------------------------

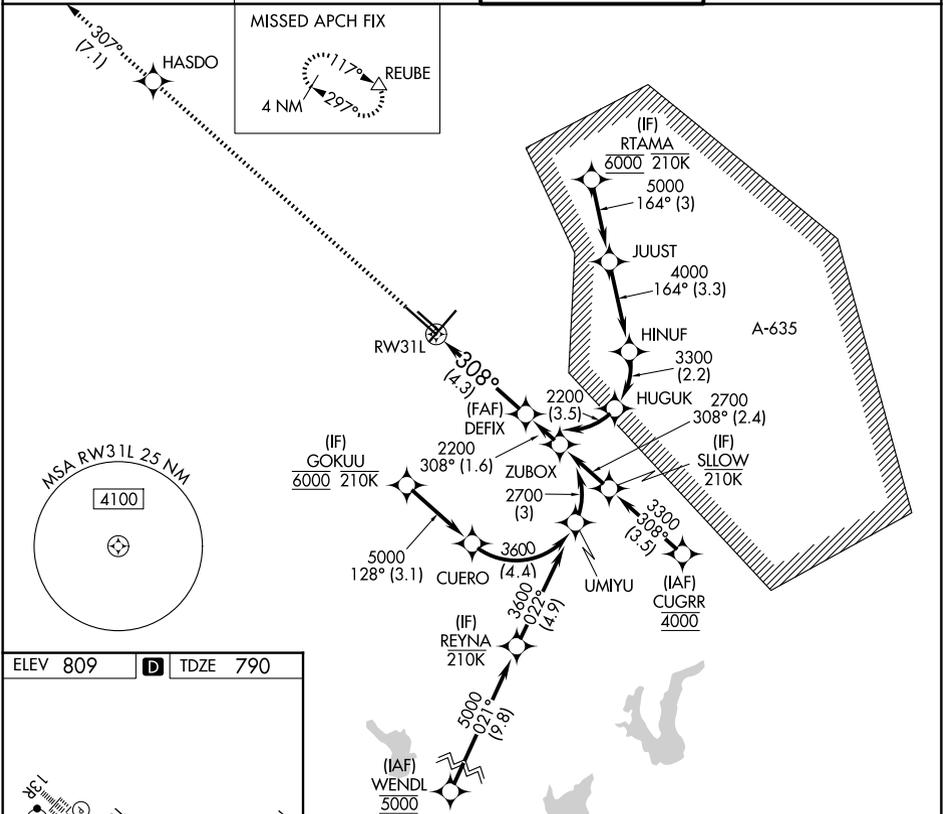

ELEV 809	D	TDZE 790
----------	----------	----------



TDZL/RCLS Rwy 13R
REIL Rwy 13L, 22 and 31R
HIRL Rwy 4-22 and 13R-31L
MIRL Rwy 13L-31R

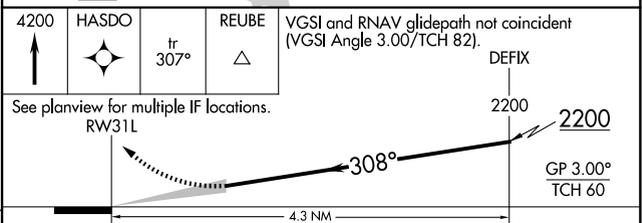

CATEGORY	A	B	C	D
RNP 0.15 DA		1144/30	354 (400-%)	
RNP 0.30 DA		1200/40	410 (400-%)	

AUTHORIZATION REQUIRED

SC-3, 19 FEB 2026 to 19 MAR 2026

SC-3, 19 FEB 2026 to 19 MAR 2026