


LOC/DME I-SUX <b>109.3</b> Chan <b>30</b>	APP CRS <b>313°</b>	Rwy Ldg TDZE Apt Elev	<b>9002</b> <b>1096</b> <b>1098</b>
---	------------------------	-----------------------------	---

# ILS or LOC RWY 31



SIoux GATEWAY/BRIG GENERAL BUD DAY FLD (SUX)

ADF required. DME required for LOC only. RADAR required for procedure entry.	MALSR 	MISSED APPROACH: Climb to 3100 direct TOMMI LOM and hold, continue climb-in-hold to 3100.
<b>▼</b> Autopilot coupled approach NA below 2025 MSL. For inop ALS, increase S-ILS 31 Cat E visibility to RVR 4000 and S-LOC 31 Cat E to 1 1/2 SM. <b>▲</b> *RVR 1800 authorized with use of FD or AP or HUD to DA.		

ATIS <b>119.45 270.8</b>	SIoux CITY APP CON * <b>124.6 307.0</b>	SIoux CITY TOWER * <b>118.7 (CTAF) 0 254.3</b>	GND CON <b>121.9 348.6</b>	UNICOM <b>122.95</b>
-----------------------------	--	---	-------------------------------	-------------------------

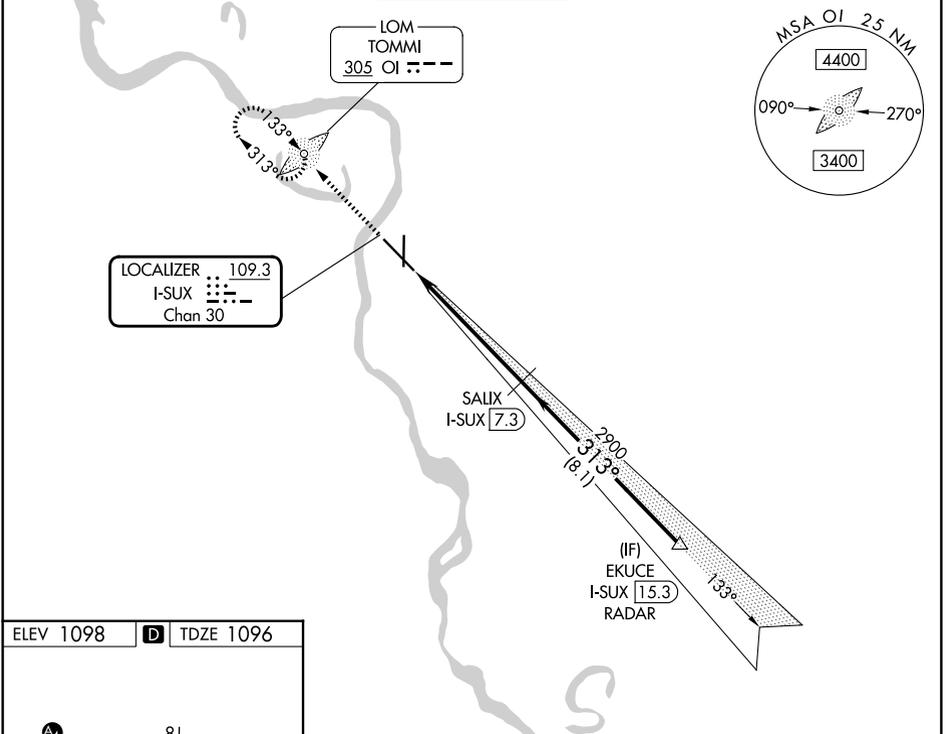

ELEV 1098 **D** TDZE 1096

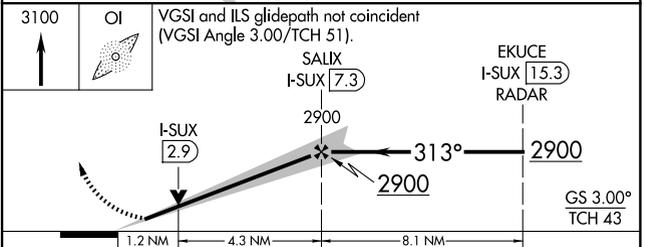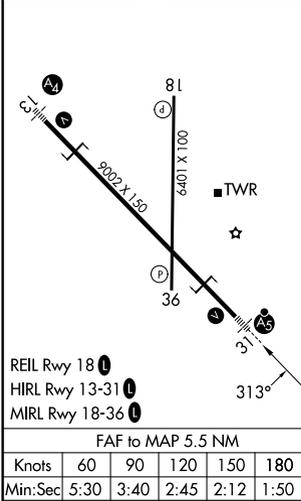

CATEGORY	A	B	C	D	E
S-ILS 31*	1296/24 200 (200-1/2)				
S-LOC 31	1540/24	444 (500-1/2)	1540/45 444 (500-7/8)		
CIRCLING	1640-1 542 (600-1)	1700-1 602 (700-1)	1700-1 1/4 602 (700-1 1/4)	1860-2 1/2 762 (800-2 1/2)	1940-3 842 (900-3)

SIoux CITY, IOWA  
Amdt 27 24MAR22

SIoux GATEWAY/BRIG GENERAL BUD DAY FLD (SUX)  
42°24'N-96°23'W

# ILS or LOC RWY 31

NC-3, 19 FEB 2026 to 19 MAR 2026

NC-3, 19 FEB 2026 to 19 MAR 2026