



WAAS CH 99323 W21A	APP CRS 210°	Rwy Ldg TDZE Apt Elev	8999 1430 1430
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 21


JOE FOSS FLD (FSD)

RNP APCH - GPS.	MALSR 	MISSED APPROACH: Climb to 4000 direct KASME and hold.
<p>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.</p>		

ATIS 126.6	SIoux FALLS APP CON* 125.8 284.725	SIoux FALLS TOWER* 118.3 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 122.95
----------------------	--	---	-------------------------------	-------------------------

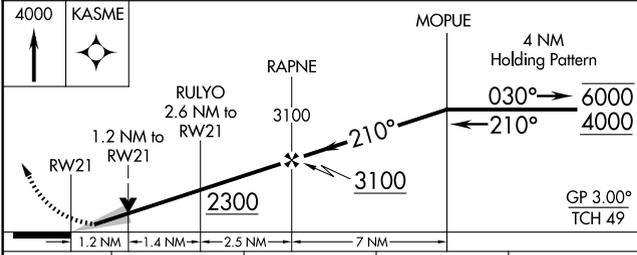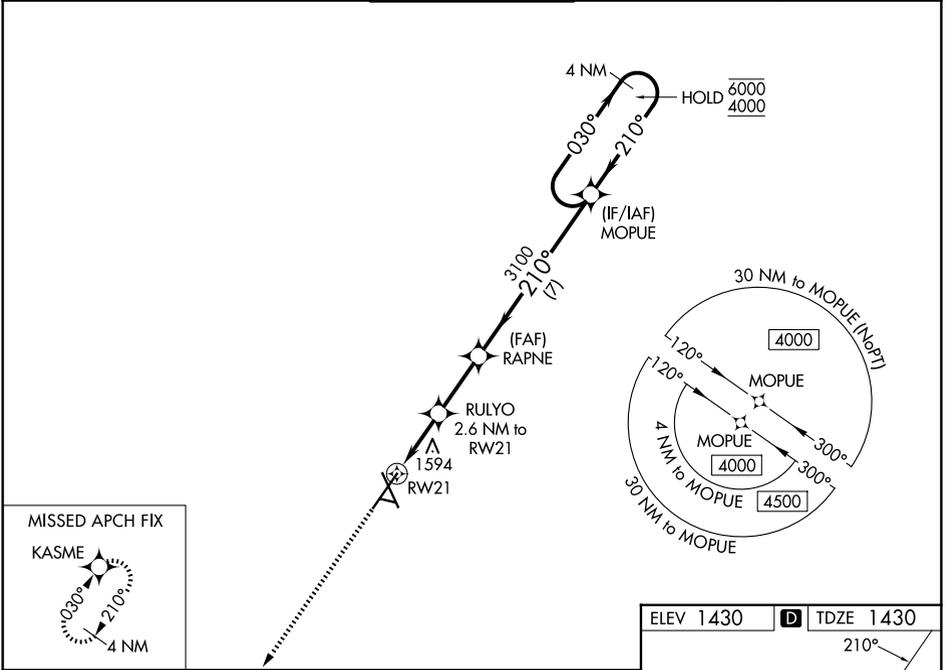

CATEGORY	A	B	C	D
LPV DA	1630/18		200 (200-½)	
LNAV/VNAV DA	1704/24		274 (300-½)	
LNAV MDA	1860/24 430 (500-½)		1860/40 430 (500-¾)	
CIRCLING	1980-1 550 (600-1)		2060-1¾ 630 (700-1¾) 2200-2½ 770 (800-2½)	

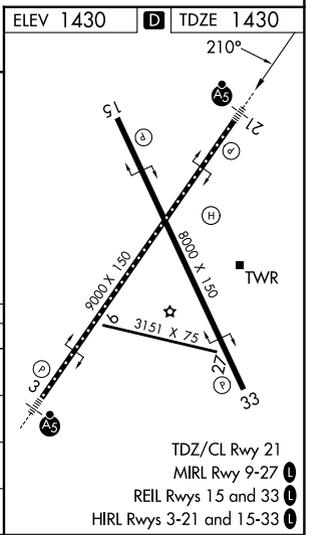

NC-1, 19 FEB 2026 to 19 MAR 2026

NC-1, 19 FEB 2026 to 19 MAR 2026