


LOC I-UXW 109.3	APP CRS 094°	Rwy Ldg TDZE Apt Elev	8412 790 798
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 9R


SOUTH BEND INTL (SBN)

ADF and RADAR required.		MALSF	MISSED APPROACH: Climb to 3000 direct MISHA LOM/RADAR and hold, continue climb-in-hold to 3000.
<p>▼ Rwy 9R helicopter visibility reduction below RVR 4000 NA. For inop ALS, increase S-ILS 9R visibility all Cats to RVR 5500, increase S-LOC 9R Cats C/D visibility to RVR 6000. Circling Rwy 27R NA at night.</p>			

ATIS 120.675	SOUTH BEND APP CON★ 118.55 257.8	SOUTH BEND TOWER★ 135.675 (CTAF) 0 257.8	GND CON 121.7
------------------------	--	--	-------------------------

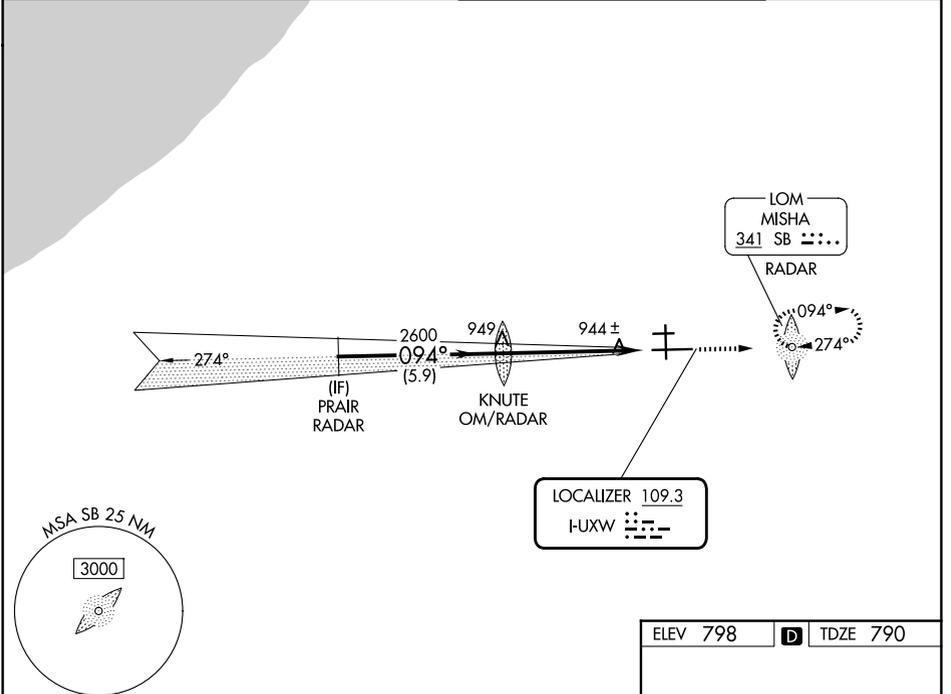

PRAIR RADAR		KNUTE OM/RADAR	
2600		2600	
GS 3.00° TCH 55		3000 SB	
5.9 NM		5.3 NM	
CATEGORY	A	B	C
S-ILS 9R	1135/40		345 (400-¾)
S-LOC 9R	1200/40	410 (500-¾)	1200/50 410 (500-1)
CIRCLING	1280-1	482 (500-1)	1440-1¾ 642 (700-1¾) 1520-2¼ 722 (800-2¼)

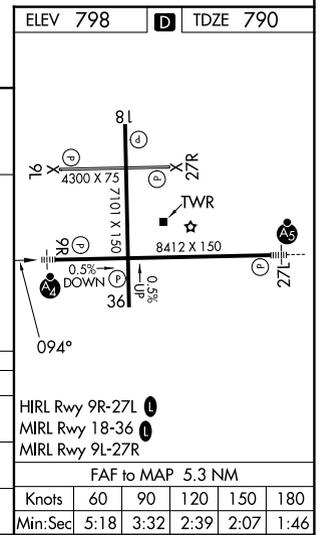

EC-2, 19 FEB 2026 to 19 MAR 2026

EC-2, 19 FEB 2026 to 19 MAR 2026