

TACAN Y RWY 4L

TACAN SSC Chan 38	APCH CRS 043°	Rwy Idg	4L	4R
		TDZE	240	236
		Arpt Elev	241	241

[USAF]


SHAW AFB (KSSC)

RADAR required when R-6002 active.
 * When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE vis to 1½ miles.



MISSED APPROACH: Climbing to 2000, intercept SSC TACAN R-042 to GABLE and hold.


ATIS★ 132.125 270.1	APP CON★ 125.4 318.1	TOWER★ 126.65 254.25	GND CON 126.1 275.8
-------------------------------	--------------------------------	--------------------------------	-------------------------------

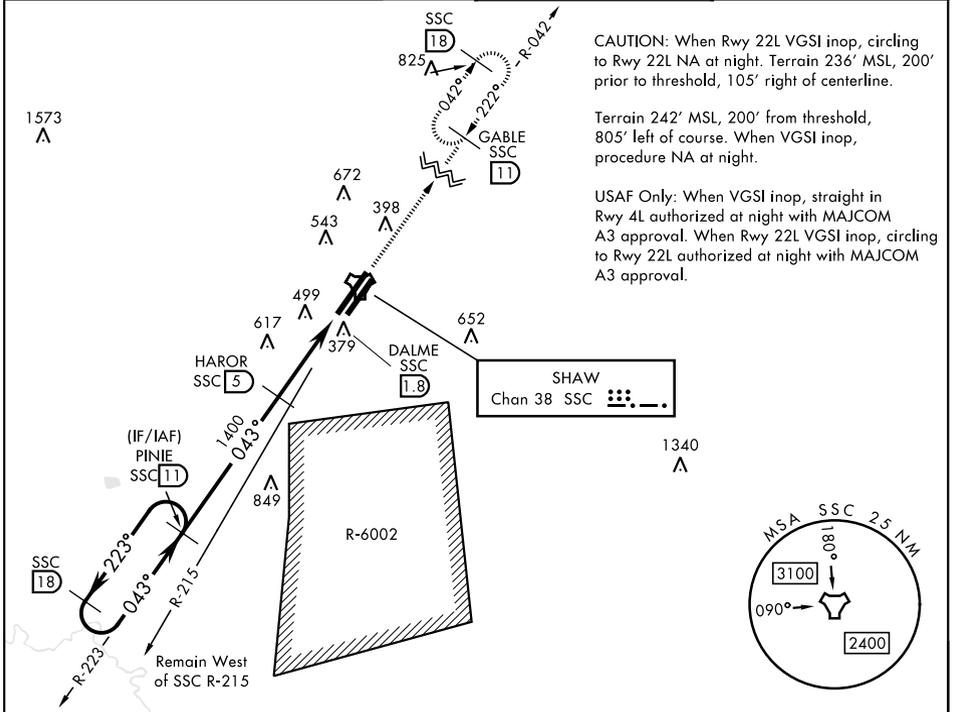



CAUTION: When Rwy 22L VGS1 inop, circling to Rwy 22L NA at night. Terrain 236' MSL, 200' prior to threshold, 105' right of centerline.

Terrain 242' MSL, 200' from threshold, 805' left of course. When VGS1 inop, procedure NA at night.

USAF Only: When VGS1 inop, straight in Rwy 4L authorized at night with MAJCOM A3 approval. When Rwy 22L VGS1 inop, circling to Rwy 22L authorized at night with MAJCOM A3 approval.



EMERG SAFE ALT 100 NM 3800

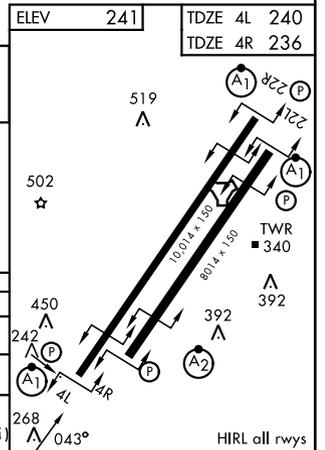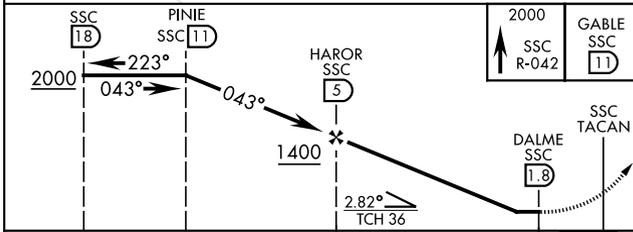

CATEGORY	A	B	C	D	E
S-4L *	800/50	560 (600-1)	800/60	560 (600-1½)	
SIDESTEP * 4R	800/50	564 (600-1)	800-1¾	564 (600-1½)	
CIRCLING	820-1 579 (600-1)	880-1 639 (700-1)	1000-2¼ 759 (800-2¼)	1000-2½ 759 (800-2½)	1000-2¾ 759 (800-2¾)

TACAN Y RWY 4L

SE-2, 19 FEB 2026 to 19 MAR 2026

SE-2, 19 FEB 2026 to 19 MAR 2026