

WAAS
CH **70520**
W28A

APP CRS
277°

Rwy Ldg
TDZE **26**
Apt Elev **26**


RNAV (GPS) RWY 28

TAMPA INTL (TPA)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F).
DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2000 direct POLVY and hold.

ARR 126.45	D-ATIS 128.475	TAMPA APP CON 118.5 307.175	TAMPA TOWER 119.5 269.4	GND CON 121.7 269.4	CLNC DEL 133.6	CPDLC
----------------------	--------------------------	---------------------------------------	-----------------------------------	-------------------------------	--------------------------	-------

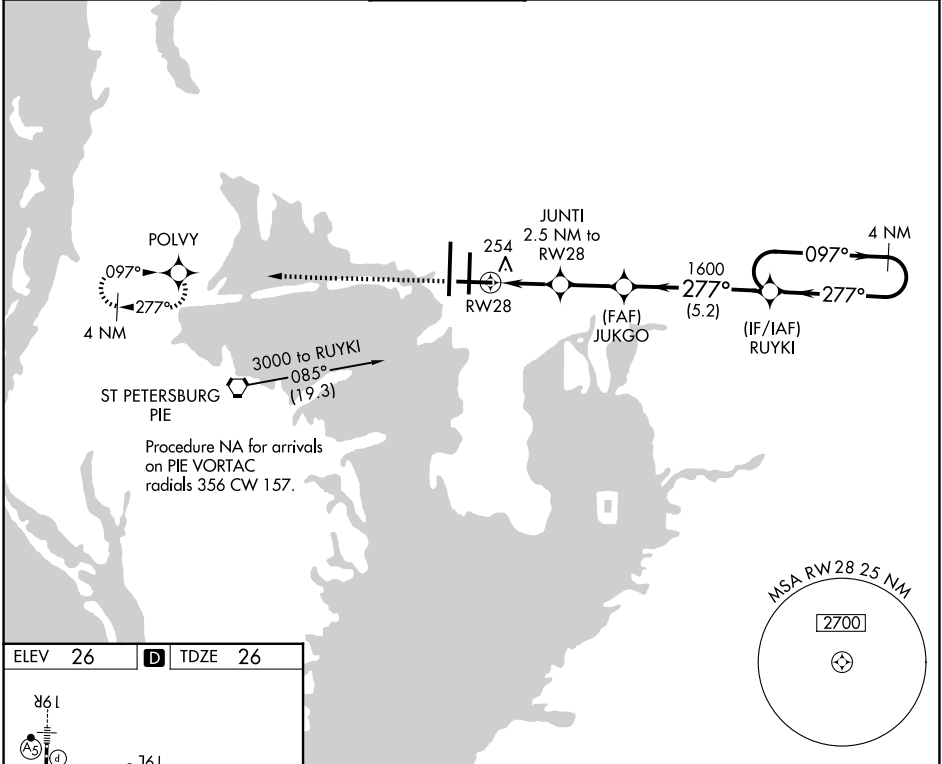

ELEV 26

D

TDZE 26

2000

POLVY

JUNTI
2.5 NM to RWY 28

JUKGO
1600

RUYKI
4 NM Holding Pattern

* LNAV only.

RWY 28

860*

1600

2000

GP 3.00°
TCH 50

CATEGORY	A	B	C	D
LPV DA	389-1½		363 (400-1½)	
LNAV/VNAV DA	468-1½		442 (500-1½)	
LNAV MDA	520-1	494 (500-1)	520-1¾	494 (500-1¾)
CIRCLING	600-1	574 (600-1)	680-1¾ 654 (700-1¾)	980-3 954 (1000-3)

REIL Rwy 1R
TDZ/CL Rwy 1L and 19L
HRL Rwy 1L-19R, 1R-19L, and 10-28