


LOC I-TRI 109.9	APP CRS 230°	Rwy Ldg 8000
		TDZE 1518
		Apt Elev 1519

ILS or LOC RWY 23

TRI-CITIES (TRI)

ADF or RADAR required.		ALSIF-2 		MISSED APPROACH: Climb to 3800 direct BOOIE LOM/RADAR and hold.	
<p>⚠ Circling to Rwy 9 NA at night. Circling NA northwest of Rwy 9 and 23. CAUTION: Air traffic control tower 1634 feet MSL located 940 feet right of runway centerline 357 feet from runway threshold. When control tower closed: S-ILS 23 increase visibilities to RVR 4000 all Cats and S-LOC 23 increase visibilities 1/2 SM all Cats.</p>					
ATIS 118.25	TRI-CITY APP CON ★ 134.425 349.0	TRI-CITY TOWER ★ 119.5 (CTAF) 257.8	GND CON 121.7 348.6	UNICOM 122.95	

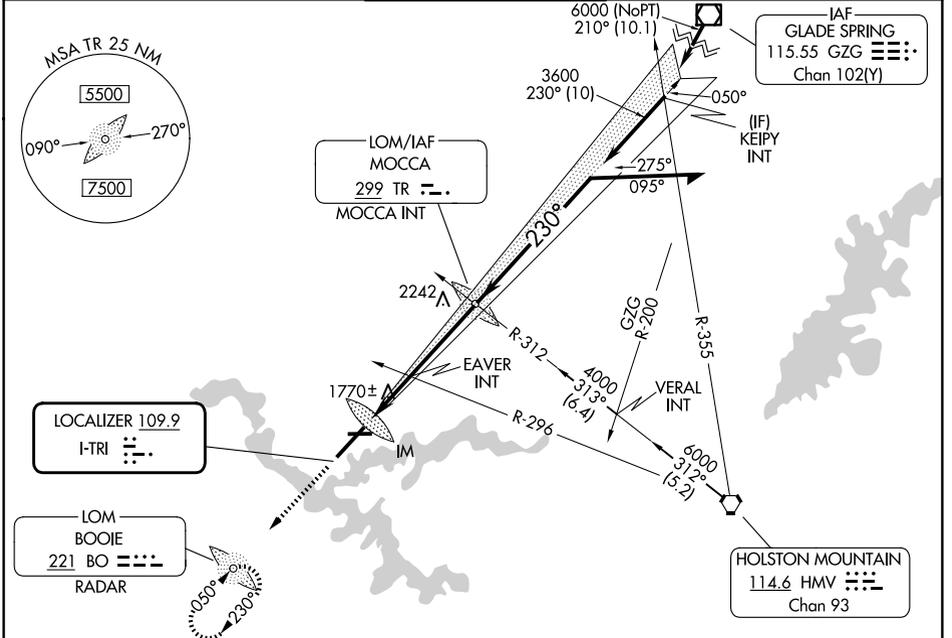

SE-1, 19 FEB 2026 to 19 MAR 2026

SE-1, 19 FEB 2026 to 19 MAR 2026

ELEV 1519	D	TDZE 1518	3800	BO																																			
<p>REIL Rwy 5 and 27 TDZL/RCLS Rwy 23 HIRL Rwy 5-23 MIRL Rwy 9-27</p>		<p>FAF to MAP 6 NM</p> <table border="1"> <tr> <td>Knots</td> <td>60</td> <td>90</td> <td>120</td> <td>150</td> <td>180</td> </tr> <tr> <td>Min:Sec</td> <td>6:00</td> <td>4:00</td> <td>3:00</td> <td>2:24</td> <td>2:00</td> </tr> </table>			Knots	60	90	120	150	180	Min:Sec	6:00	4:00	3:00	2:24	2:00																							
Knots	60	90	120	150	180																																		
Min:Sec	6:00	4:00	3:00	2:24	2:00																																		
<table border="1"> <thead> <tr> <th>CATEGORY</th> <th>A</th> <th>B</th> <th>C</th> <th>D</th> </tr> </thead> <tbody> <tr> <td>S-ILS 23</td> <td colspan="4">1718/18 200 (200-1/2)</td> </tr> <tr> <td>S-LOC 23</td> <td>2500/40 982 (1000-3/4)</td> <td>2500-1 982 (1000-1)</td> <td>2500-2 1/2</td> <td>982 (1000-2 1/2)</td> </tr> <tr> <td>CIRCLING</td> <td>2500-1 1/4 981 (1000-1 1/4)</td> <td>2500-1 1/2 981 (1000-1 1/2)</td> <td colspan="2">2500-3 981 (1000-3)</td> </tr> <tr> <td colspan="5">EAVER FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)</td> </tr> <tr> <td>S-LOC 23</td> <td colspan="2">2020/24 502 (600-1/2)</td> <td colspan="2">2020/55 502 (600-1)</td> </tr> <tr> <td>CIRCLING</td> <td>2120-1 601 (700-1)</td> <td>2180-1 661 (700-1)</td> <td>2320-2 1/4 801 (900-2 1/4)</td> <td>2500-3 981 (1000-3)</td> </tr> </tbody> </table>		CATEGORY	A	B	C	D	S-ILS 23	1718/18 200 (200-1/2)				S-LOC 23	2500/40 982 (1000-3/4)	2500-1 982 (1000-1)	2500-2 1/2	982 (1000-2 1/2)	CIRCLING	2500-1 1/4 981 (1000-1 1/4)	2500-1 1/2 981 (1000-1 1/2)	2500-3 981 (1000-3)		EAVER FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)					S-LOC 23	2020/24 502 (600-1/2)		2020/55 502 (600-1)		CIRCLING	2120-1 601 (700-1)	2180-1 661 (700-1)	2320-2 1/4 801 (900-2 1/4)	2500-3 981 (1000-3)	<p>GS 3.00° TCH 56</p>		
CATEGORY	A	B	C	D																																			
S-ILS 23	1718/18 200 (200-1/2)																																						
S-LOC 23	2500/40 982 (1000-3/4)	2500-1 982 (1000-1)	2500-2 1/2	982 (1000-2 1/2)																																			
CIRCLING	2500-1 1/4 981 (1000-1 1/4)	2500-1 1/2 981 (1000-1 1/2)	2500-3 981 (1000-3)																																				
EAVER FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)																																							
S-LOC 23	2020/24 502 (600-1/2)		2020/55 502 (600-1)																																				
CIRCLING	2120-1 601 (700-1)	2180-1 661 (700-1)	2320-2 1/4 801 (900-2 1/4)	2500-3 981 (1000-3)																																			