

# ILS or LOC RWY 20

WALLA WALLA RGNL (ALW)

LOC I-ALW <b>111.7</b>	APP CRS <b>202°</b>	Rwy Ldg <b>6527</b>
		TDZE <b>1194</b>
		Apt Elev <b>1194</b>


**DME required.**

**⚠** DME from ALW VOR/DME. Simultaneous reception of I-ALW and ALW VOR/DME required. For inop ALS, increase S-LOC 20 Cat C/D visibility to 2½ SM.  
 # RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Pendleton altimeter setting).


**MALS R**

**MISSED APPROACH:** Climb to 1800 then climbing right turn to 4000 on heading 346° and ALW VOR/DME R-314 to BACUN INT/ALW 15.4 DME and hold.

ASOS <b>135.875</b>	SPOKANE APP CON * <b>133.15 379.15</b>	WALLA WALLA TOWER * <b>118.5 (CTAF) 289.4</b>	GND CON <b>121.6 289.4</b>	UNICOM <b>122.95</b>
------------------------	---	--	-------------------------------	-------------------------

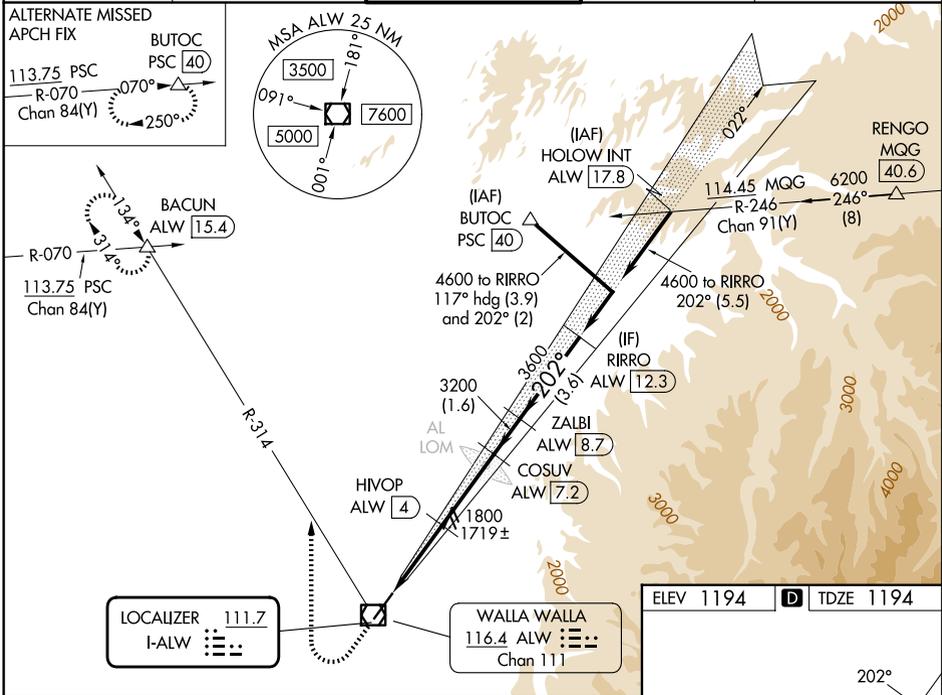

1800	4000	ALW R-314	BACUN		
↑	hdg 346°		△		
		ALW 1	HIVOP ALW 4	COSUV ALW 7.2	ZALBI ALW 8.7
		ALW 3.3			RIRRO ALW 12.3
				3200	4600
				2400	3600
				2.3 NM	0.7 NM
				3.1 NM	1.6 NM
				3.6 NM	
				GS 3.00°	TCH 50
CATEGORY	A	B	C	D	
S-ILS 20#	1394/24		200 (200-½)		
S-LOC 20	1980/24 786 (800-½)	1980/40 786 (800-¾)	1980-1¾ 786 (800-1¾)		
CIRCLING	1980-1 786 (800-1)	1980-1¼ 786 (800-1¼)	2120-2¾ 926 (1000-2¾)	2300-3 1106 (1200-3)	

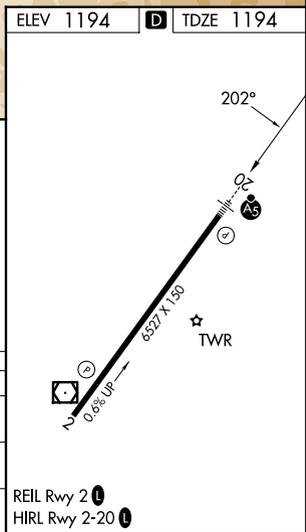

NW-1, 19 FEB 2026 to 19 MAR 2026

NW-1, 19 FEB 2026 to 19 MAR 2026