

APP CRS	Rwy Ldg	6869
007°	TDZE	14
	Apt Elev	14

RNAV (RNP) RWY 1

RONALD REAGAN WASHINGTON NTL (DCA)

▽ For uncompensated Baro-VNAV systems, procedure NA below -10°C (14°F) or above 48°C (120°F). RF required. GPS required. Missed approach requires RNP less than 1.0. For inop ALS, increase RNP 0.30 all Cats visibility to 1¼ mile.

ALSF-2


MISSED APPROACH: (Do not exceed 185K until FIVUD) Climb to 2200 left turn to FIVUD and on track 327° to HESLO and on track 327° to GTN NDB and hold.

D-ATIS 132.65	POTOMAC APP CON 119.85 239.25 (W/S) 124.2 360.8 (E)	WASHINGTON TOWER 119.1 257.6	GND CON 121.7 257.6
-------------------------	---	--	-------------------------------

MISSED APCH FIX

4 NM

GEORGETOWN
GTN

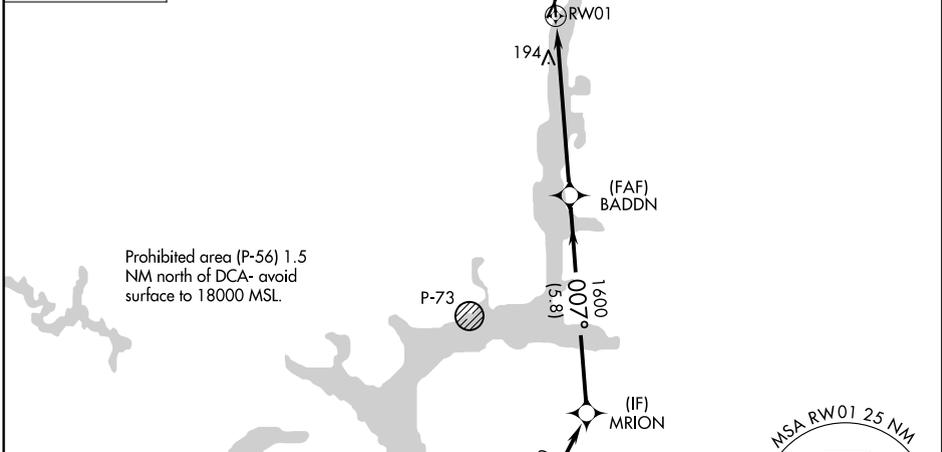

ELEV 14	D	TDZE 14
REIL Rwys 4, 22, 15 and 33		
MIRL Rwy 4-22 and 15-33		
HIRL Rwys 1-19		
TDZ/CL Rwy 1		

TWR

007°

2200	FIVUD	HESLO	GTN	MRION
↑	tr 327°	tr 327°		
BADDN		MRION		
RW01	1600	2500	GP 3.00° TCH 54	
4.8 NM		5.8 NM		
CATEGORY	A	B	C	D
RNP 0.30 DA	552/60		538 (600-1¼)	
AUTHORIZATION REQUIRED				

NE-3, 19 FEB 2026 to 19 MAR 2026

NE-3, 19 FEB 2026 to 19 MAR 2026