

FAIRFIELD, CALIFORNIA

# ILS or LOC or RNAV (GPS) RWY 21L

SBAS Chan <b>62106</b> <b>W21A</b>	APCH CRS <b>215°</b>	Rwy Idg <b>10,995</b> TDZE <b>58</b> Arprt Elev <b>63</b>
--	-------------------------	---

[USAF]

TRAVIS AFB (KSUU)


RNP APCH. RNAV1 - GPS or RADAR required for ILS, LOC.  
 RADAR required for CAT E aircraft for full procedure off of SEATO.  
 \* When ALS inop, increase RVR to 40, vis to 3/4 miles.  
 \*\* When ALS inop, increase CAT AB RVR to 55, vis to 1 mile;  
 CAT CDE vis to 1 1/4 miles.  
 \*\*\*Circling not authorized NW of Rwy 3L-21R.




MISSED APPROACH: Climb to 2200 then climbing right turn to 4500 direct SEATO and hold, continue climb in hold to 4500.

ATIS <b>135.55 292.125</b>	APP CON <b>119.9 322.325 (S)</b> <b>126.6 281.45 (N)</b>	TOWER <b>120.75 254.4</b>	GND CON <b>121.8 289 4</b>
-------------------------------	--	------------------------------	-------------------------------

† When TDZ/CL inop, increase RVR to 24, RVR 18 authorized use of FD or AP or HUD to DA.

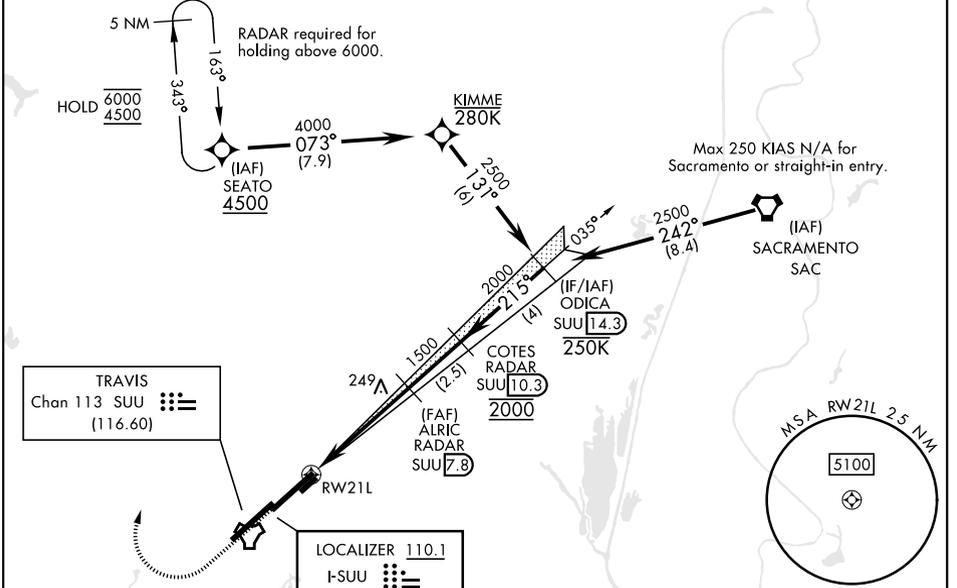


EMERG SAFE ALT 100 NM 13,000

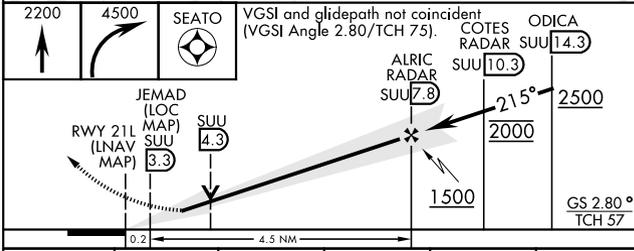

ELEV	63	TDZE	58
------	----	------	----

CATEGORY	A	B	C	D	E
S-ILS 21L**	258/18		200	(200-1/2)	
LPV DA**	258/18		200	(200-1/2)	
S-LOC 21L**	500/24	442 (500-1/2)	500/45	442 (500-7/8)	
RNAV MDA**	500/24	442 (500-1/2)	500/45	442 (500-7/8)	
CIRCLING***	560-1	660-1	1100-3	1200-3 1137 (1200-3)	
	497 (500-1)	597 (600-1)	1037(1100-3)		

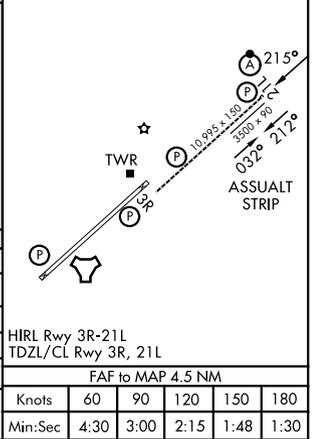

FAIRFIELD, CALIFORNIA  
 Orig 19MAY22

38°16'N-121°55'W

TRAVIS AFB (KSUU)

# ILS or LOC or RNAV (GPS) RWY 21L

SW-2, 19 FEB 2026 to 19 MAR 2026

SW-2, 19 FEB 2026 to 19 MAR 2026