

LOC/DME I-FMN	APP CRS	Rwy Ldg	6248
111.9	256°	TDZE	5507
Chan 56		Apt Elev	5507


ILS or LOC RWY 25
FOUR CORNERS RGNL (FMN)

DME required.



⚠ VDP N/A with Durango altimeter setting. Circling N/A for Cat D southeast of Rwy 5 and south of Rwy 25. When local altimeter setting not received, use Durango altimeter setting and increase S-ILS 25 DA to 5950 feet and all visibilities ½ SM; increase all MDAs 260 feet and S-LOC 25 visibility Cat C/D ¾ SM, and Circling visibility Cat B ¼ SM and Cat C ½ SM.

MISSED APPROACH: Climb to 6100 then climbing right turn to 9000 on heading 321° and on RSK VORTAC R-280 to FLUME INT and hold, continue climb-in-hold to 9000.

ATIS 127.15	DENVER CENTER 118.575 348.7	FARMINGTON TOWER★ 118.9 (CTAF) 257.8	GND CON 121.7	UNICOM 122.95
----------------	--------------------------------	---	------------------	------------------

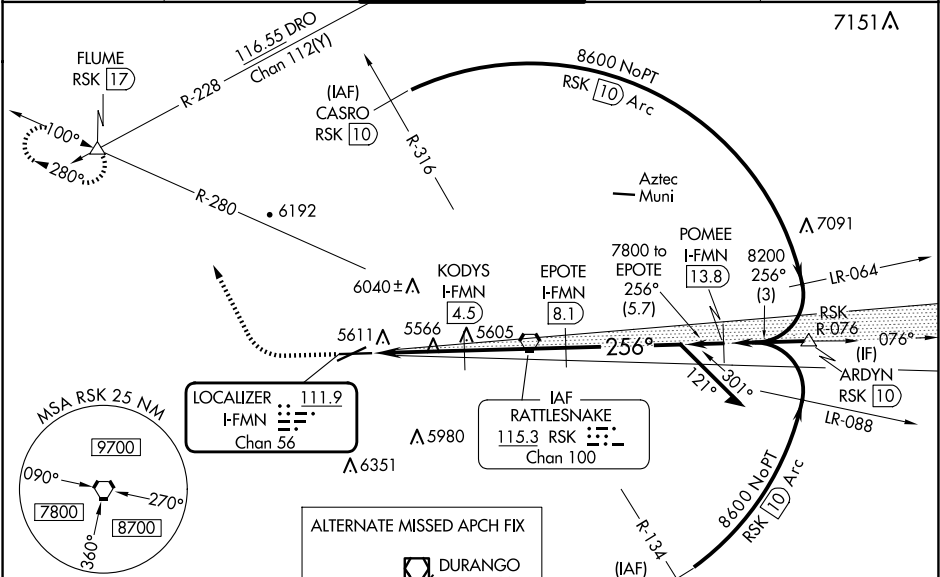

ELEV 5507	D	TDZE 5507
-----------	---	-----------

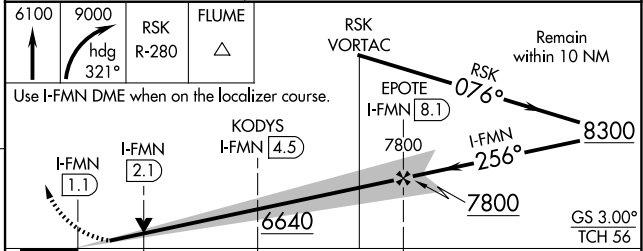

CATEGORY	A	B	C	D
S-ILS 25	5707-¾	200 (200-¾)		
S-LOC 25	5880-1	373 (400-1)		
☒ CIRCLING	6020-1 513 (600-1)	6140-1 633 (700-1)	6380-2½ 873 (900-2½)	6400-3 893 (900-3)

REIL Rws 23 and 25

MIRL Rws 5-23 and 7-25

FAF to MAP 7 NM

Knots	60	90	120	150	180
Min:Sec	7:00	4:40	3:30	2:48	2:20

SW-1, 19 FEB 2026 to 19 MAR 2026

SW-1, 19 FEB 2026 to 19 MAR 2026