

WAAS CH 90523 W21A	APP CRS 208°	Rwy Idg TDZE Apt Elev	5500 3286 3298
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 21


CHADRON MUNI (CDR)

RNP APCH-GPS

Baro-VNAV NA when using Pine Ridge altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. VDP NA with Pine Ridge altimeter setting. When local altimeter setting not received, use Pine Ridge altimeter setting and increase LPV DA to 3606 feet, LNAV/VNAV DA to 3754 feet and all MDA 80 feet; increase LNAV/VNAV visibility ¼ SM all Cats, LNAV Cats C and D visibility ¼ SM, and Circling Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 7500 direct HADIR and hold, continue climb-in-hold to 7500.

ASOS 118.05	DENVER CENTER 127.95 338.2	UNICOM 122.8 (CTAF)
-----------------------	--------------------------------------	-------------------------------

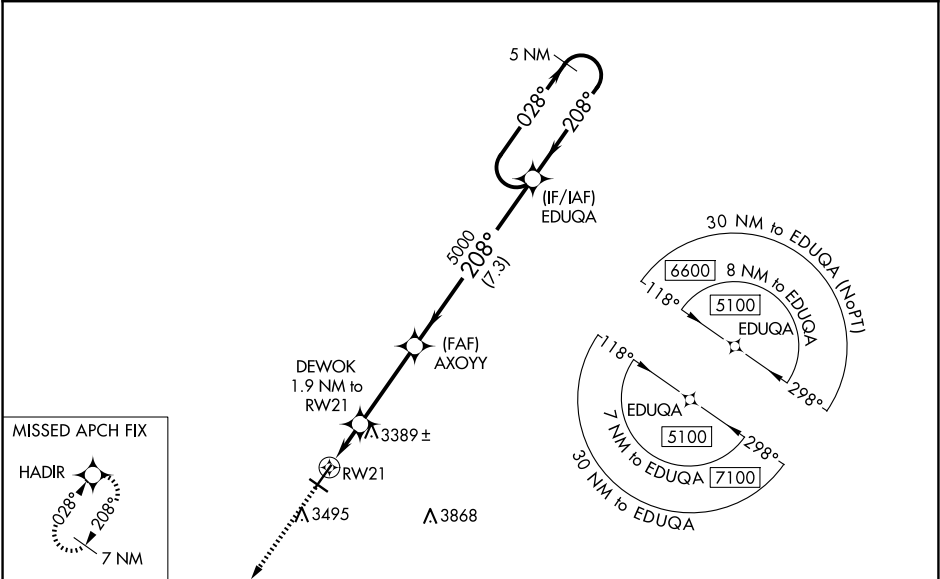

ELEV 3298		TDZE 3286
-----------	--	-----------

208° to RW21

5998 X 100
0.5% UP

4400 X 7.5

3363

7500 HADIR

*LNAV only

*1 NM to RW21

DEWOK 1.9 NM to RW21

AXOYY

EDUQA

5000

3900*

5000

GP 3.00°
TCH 41

5 NM Holding Pattern

028° → 5100

← 208°

CATEGORY	A	B	C	D
LPV DA	3536-1 250 (300-1)			
LNAV/VNAV DA	3684-1½ 398 (400-1½)			
LNAV MDA	3640-1 354 (400-1)			
CIRCLING	3820-1 522 (600-1)	3920-1 622 (700-1)	3920-1¼ 622 (700-1¼)	4220-3 922 (1000-3)