

LOC/DME I-RTS 111.9 Chan 56	APP CRS 318°	Rwy Ldg TDZE 7800 5045 Api Elev 5050
--	------------------------	---


ILS or LOC RWY 32

RENO/STEAD (RTS)

NA Inoperative table does not apply. Procedure NA at night. When local altimeter setting not received, use Reno/Tahoe Intl altimeter setting and increase all DA/MDA 120 feet. VDP NA when using Reno/Tahoe Intl altimeter setting. Circling NA for Cat D southwest of Rwy 14-32.

MALSR MISSED APPROACH: Climb to 6740 then climbing right turn to 14000 on heading 356° and FMG VORTAC R-314 to HALLE INT/FMG 27 DME and hold, continue climb-in-hold to 14000.

AWOS-3 135.175	NORCAL APP CON 126.3 353.9	UNICOM 122.7 (CTAF)
--------------------------	--------------------------------------	-------------------------------

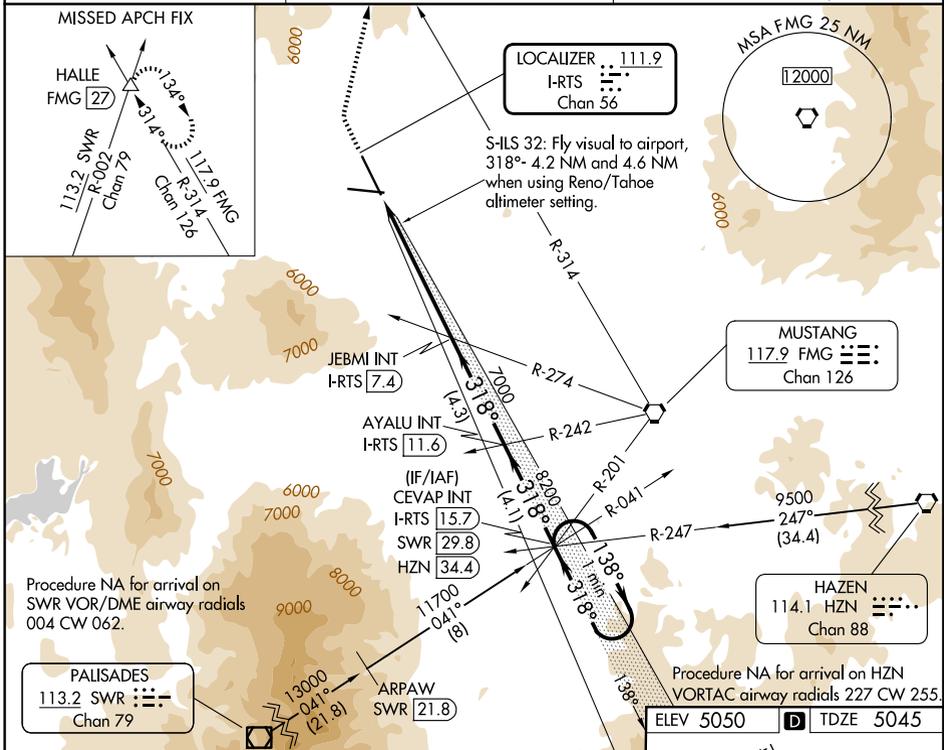

6740 14000 FMG HALLE Use I-RTS DME when on the localizer course.
R-314 △

S-ILS 32: Fly visual to airport, 318°- 4.2 NM and 4.6 NM when using Reno/Tahoe altimeter setting.

JEBMI INT I-RTS 7.4

AYALU INT I-RTS 11.6

CEVAP INT I-RTS 15.7 SWR 29.8 HZN 34.4

One Minute Holding Pattern

8200 9400

318° 138°

GS 3.00° TCH 40

5.1 NM 0.8 4.3 NM 4.1 NM

ELEV 5050	TDZE 5045
REIL Rwy 14	REIL Rws 8 and 26
HIRL Rwy 8-26	HIRL Rwy 14-32
FAF to MAP 5.9 NM	
Knots	60 90 120 150 180
Min:Sec	5:54 3:56 2:57 2:22 1:58

CATEGORY	A	B	C	D
S-ILS 32	6425-3 1380 (1400-3)			
S-LOC 32	6720-1½ 1675 (1700-1½)	6720-1½ 1675 (1700-1½)	6720-3	1675 (1700-3)
CIRCLING	6720-1½ 1670 (1700-1½)	6720-1½ 1670 (1700-1½)	6720-3	1670 (1700-3)

SW-4, 19 FEB 2026 to 19 MAR 2026

SW-4, 19 FEB 2026 to 19 MAR 2026