


WAAS CH 65631 W13A	APP CRS 136°	Rwy Ldg 4498 TDZE 2130 Apt Elev 2131
--	------------------------	---

RNAV (GPS) RWY 13

KEARNEY RGNL (E.A.R.)

RNP APCH.	Baro-VNAV and VDP NA when using Holdrege altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C or above 54°C. When local altimeter setting not received, use Holdrege altimeter setting: increase LPV DA to 2407 feet and all Cats visibility 3⁄8 SM; increase LNAV/VNAV DA to 2457 feet and all Cats visibility 3⁄8 SM and all MDAs 80 feet; increase visibility LNAV and Circling Cat C 1⁄8 SM.	MISSED APPROACH: Climb to 4300 direct VIGXI and on track 070° to LENIY and hold.
-----------	--	--

AWOS-3PT 123.875	MINNEAPOLIS CENTER 119.4 278.8	UNICOM 123.0 (CTAF) 0
----------------------------	--	---------------------------------

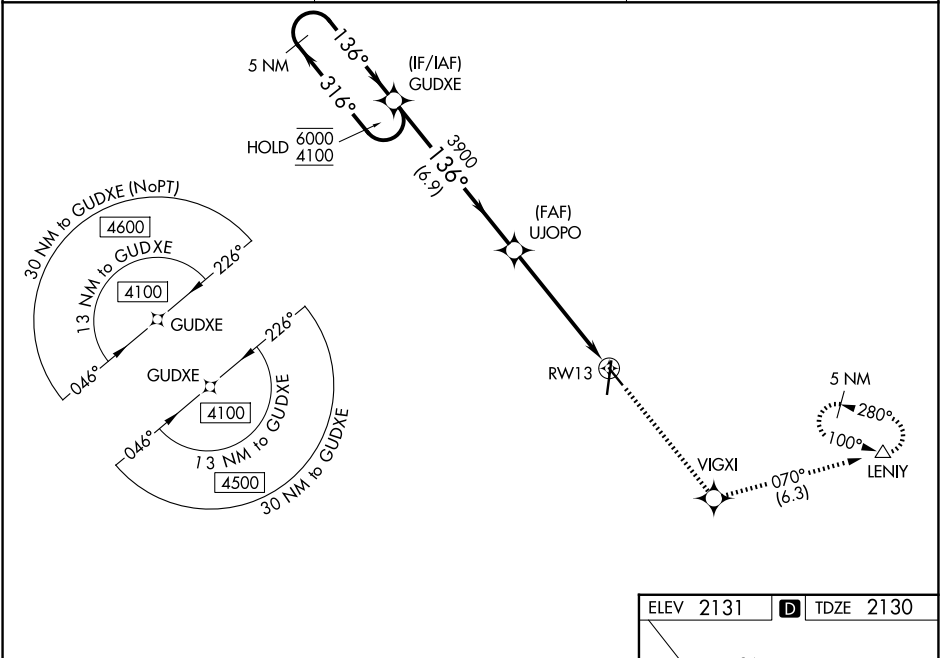

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 43).		4300	VIGXI	tr 070°	LENIY
5 NM Holding Pattern					
6000 ← 316°					
4100 → 136°					
GP 3.00° TCH 43					
		3900	*INAV only		
		3900	*1.5 NM to RW13		
		6.9 NM	3.9 NM	1.5 NM	
CATEGORY	A	B	C	D	
LPV DA	2330-3⁄4		200 (200-3⁄4)	NA	
LNAV/VNAV DA	2380-3⁄4		250 (300-3⁄4)	NA	
LNAV MDA	2720-1	590 (600-1)	2720-13⁄4 590 (600-13⁄4)	NA	
CIRCLING	2720-1	589 (600-1)	2720-13⁄4 589 (600-13⁄4)	NA	

