


WAAS CH 40002 W21A	APP CRS 208°	Rwy Ldg TDZE Apt Elev	7619 4977 5045
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 21L


PRESCOTT RGNL/ERNEST A LOVE FLD (P.R.C)

RNP APCH - GPS.	<p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 47°C. For inoperative ALS, increase LPV alt Cats visibility to 1 SM, LNAV/VNAV all Cats visibility to 1½ SM, and LNAV Cat C/D visibility to 1¾ SM. Circling Rwy 3L, 12, 30 NA at night. # Missed approach requires a minimum climb of 345 feet per NM to 7300.</p>	<p>MALSR</p>	<p>MISSED APPROACH: Climb to 5500 then climbing right turn to 9100 direct DILLY and hold, continue climb-in-hold to 9100.</p>
-----------------	--	--------------	---

ATIS 127.2	PHOENIX APP CON 133.575 281.55	PRESCOTT TOWER ★ 125.3 (CTAF) 257.9	GND CON 121.7	128.750	UNICOM 122.95
----------------------	--	---	-------------------------	----------------	-------------------------

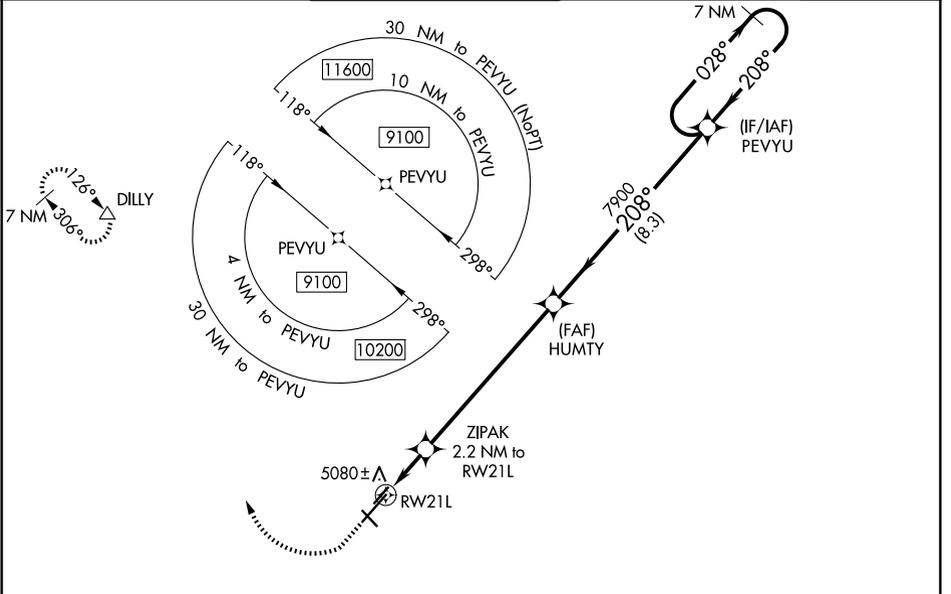

ELEV 5045	D	TDZE 4977
-----------	----------	-----------

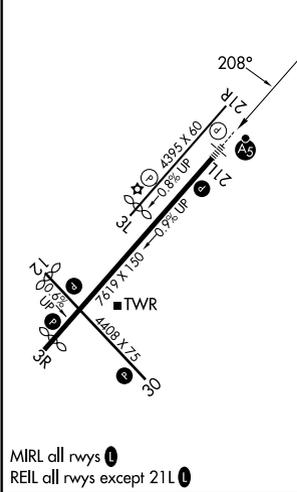

5500	9100	DILLY	ZIPAK 2.2 NM to RW21L	HUMTY 7900	PEVYU 7 NM Holding Pattern	9100
*LNAV only.			*1.5 NM to RW21L	7900		
				5700*		
						GP 3.00° TCH 55

CATEGORY	A	B	C	D
LPV DA#		5177-½	200 (200-½)	
LPV DA		5277-½	300 (300-½)	
LNAV/VNAV DA		5391-¾	414 (400-¾)	
LNAV MDA	5480-½	503 (500-½)	5480-1	503 (500-1)
CIRCLING	5520-1 475 (500-1)	5760-1 715 (800-1)	6080-3 1035 (1100-3)	6680-3 1635 (1700-3)

SW-4, 19 FEB 2026 to 19 MAR 2026

SW-4, 19 FEB 2026 to 19 MAR 2026