
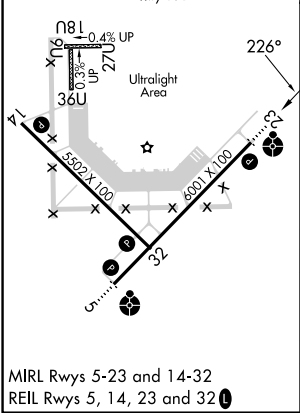


WAAS CH 48903 W23A	APP CRS 226°	Rwy Idg TDZE 578 Apt Elev 583	6001
--	------------------------	---	-------------

RNAV (GPS) RWY 23

FREEMAN MUNI (SE.R)

RNP APCH - GPS.		ODALS	MISSED APPROACH: Climb to 2500 direct JIRIP and hold.
▼ ▲ NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Inop table does not apply to LPV all Cats and LNAV Cats A/B. For inop ALS, increase LNAV/VNAV Cats C/D visibility to 1 3/8 SM.		☉	
AWOS-3 119.425	LOUISVILLE APP CON 132.075 327.0	UNICOM 122.8 (CTAF) 0	

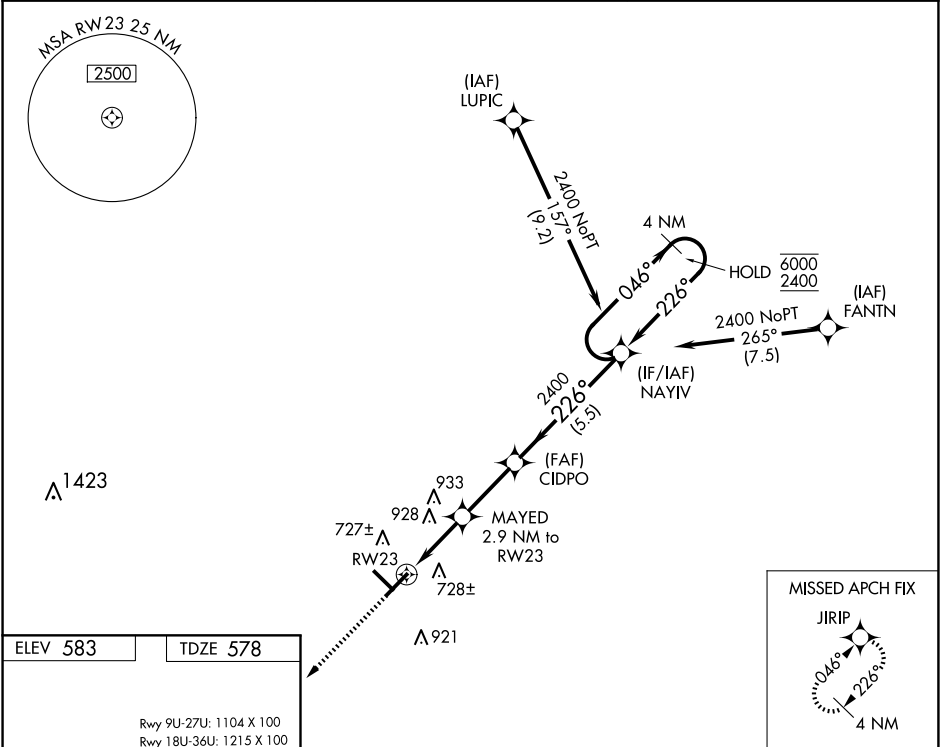

2500 JIRIP		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 33).		4 NM Holding Pattern	
RWY 23		MAYED 2.9 NM to RWY 23		CIDPO 2400	
1.7 NM to RWY 23		1.2 NM to RWY 23		2.7 NM to RWY 23	
1.7 NM		1.2 NM		2.7 NM	
CATEGORY		A		B	
LPV DA		855-1		277 (300-1)	
LNAV/VNAV DA		1020-1 1/8		442 (500-1 1/8)	
LNAV MDA		1160-1 582 (600-1)		1160-1 1/2 582 (600-1 1/2)	
CIRCLING		1160-1 577 (600-1)		1240-1 3/4 657 (700-1 3/4)	
				1240-2 657 (700-2)	

EC-2, 19 FEB 2026 to 19 MAR 2026

EC-2, 19 FEB 2026 to 19 MAR 2026