
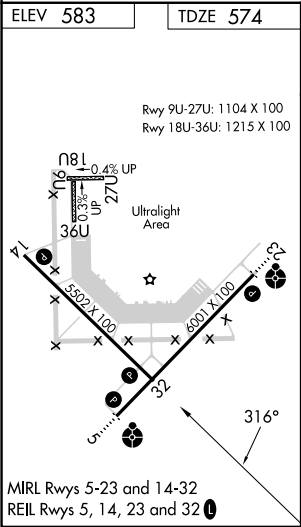



WAAS CH 99403 W32A	APP CRS 316°	Rwy Idg TDZE 574 Apt Elev 583
--	------------------------	---

RNAV (GPS) RWY 32

FREEMAN MUNI (SE'R)

RNP APCH - GPS.			MISSED APPROACH: Climb to 2600 direct RUYOT and hold.
NA Baro-VNAV and VDP NA when using Louisville Muhammad Ali Intl altimeter setting. Rwy 32 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Louisville Muhammad Ali Intl altimeter setting and increase LPV DA to 979 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 1230 feet and all visibilities ¾ SM; increase all MDAs 120 feet and LNAV visibility Cat C/D ¾ SM, and Circling visibility Cat C/D ½ SM.			
AWOS-3 119.425	LOUISVILLE APP CON 132.075 327.0	UNICOM 122.8 (CTAF) 0	

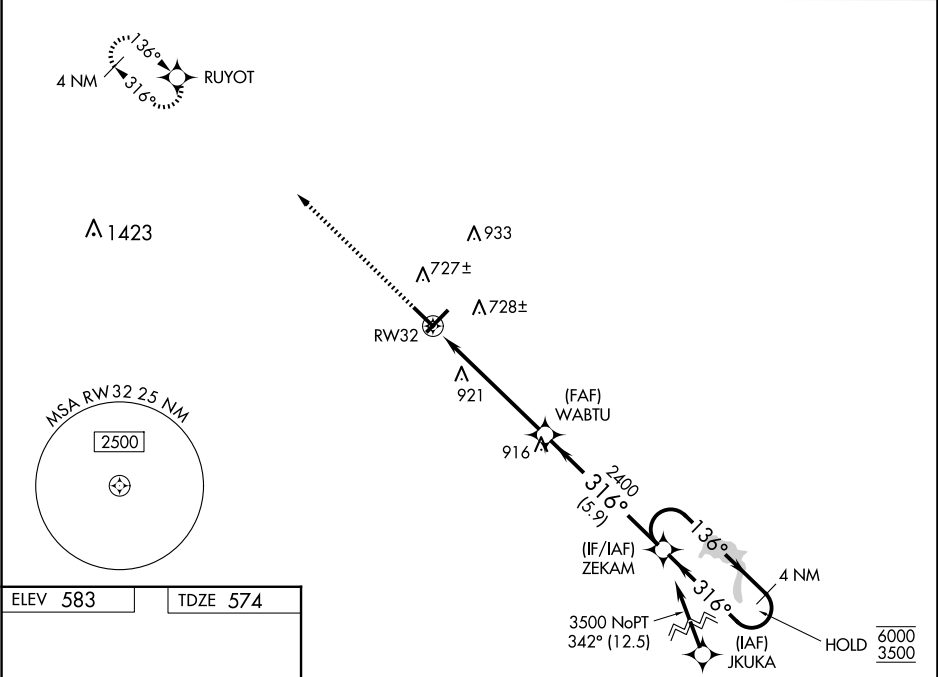

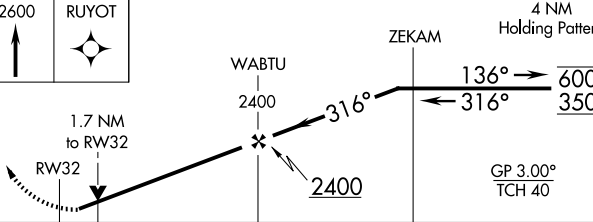2600 ↑	RUYOT 	4 NM Holding Pattern			
		WABTU 2400			ZEKAM
RW32 1.7 NM to RW32		4 NM		5.9 NM	136° → 6000 ← 316° 3500
GP 3.00° TCH 40					
CATEGORY	A	B	C	D	
LPV DA	859-1		285 (300-1)		
LNAV/ VNAV DA	1110-1½		536 (600-1½)		
LNAV MDA	1140-1	566 (600-1)	1140-1½	566 (600-1½)	
 CIRCLING	1140-1	557 (600-1)	1300-2 717 (800-2)	1300-2¼ 717 (800-2¼)	

EC-2, 19 FEB 2026 to 19 MAR 2026

EC-2, 19 FEB 2026 to 19 MAR 2026