

WAAS CH 87116 W20A	APP CRS 205°	Rwy Idg TDZE Apt Elev	5600 568 571
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 20
DANVILLE RGNL (DAN)

RNP APCH.

⚠ Baro-VNAV NA when using Roxboro, NC altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. When local altimeter setting not received, use Roxboro, NC altimeter setting and increase all DA 62 feet and all MDA 80 feet; increase LPV and LNAV/VNAV all Cats visibility ¼ mile and LNAV Cats C and D ¼ mile. VDP NA with Roxboro, NC altimeter setting.

MISSED APPROACH: Climb to 2500 direct LANTA and hold.

ASOS 128.125	WASHINGTON CENTER 124.05 352.0	UNICOM 123.05 (CTAF) 0
------------------------	--	----------------------------------

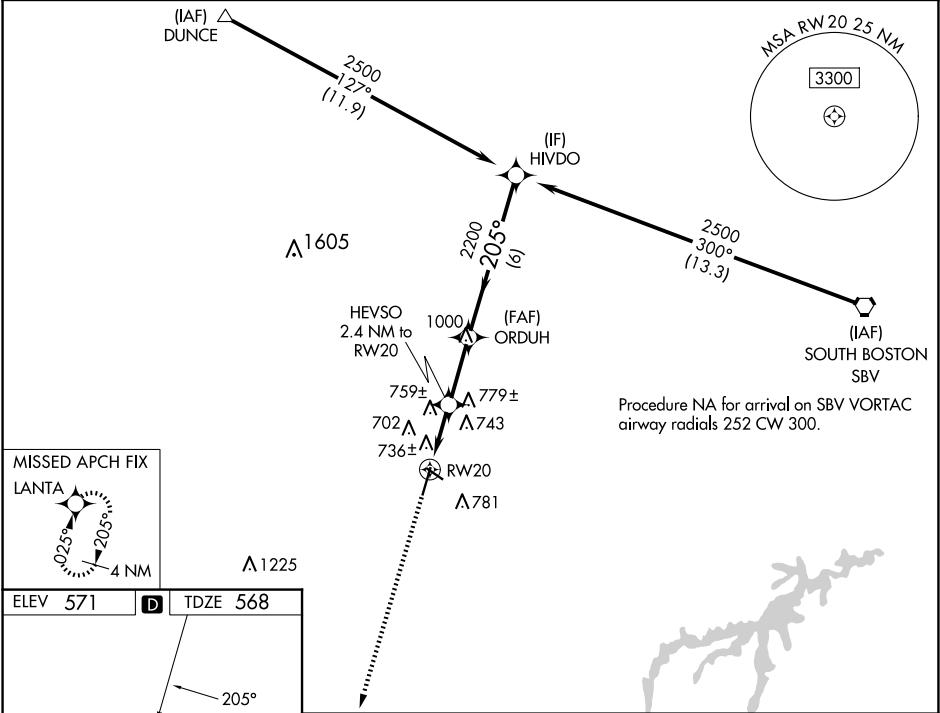

ELEV 571	D	TDZE 568
Diagram illustrating the final approach segment for RWY 20. Key waypoints and altitudes include: LANTA (2500), HEVSO (2.4 NM to RW20, 1380*), ORDUH (2200), and HIVDO (2500). Distances between waypoints are 1.3 NM, 1.1 NM, 2.5 NM, and 6 NM. The diagram also shows the HIRL Rwy 2-20, MIRL Rwy 13-31, and REIL Rwy 13, 20 and 31.		
*LNAV only.		
*1.3 NM to RW20		
HEVSO 2.4 NM to RW20		
ORDUH 2200		
HIVDO 2500		
Procedure Turn NA		
GP 3.00°		
TCH 50		
CATEGORY	A	B
LPV	DA	768-1 200 (200-1)
LNAV/VNAV	DA	1026-1½ 458 (500-1½)
LNAV MDA	1020-1 452 (500-1)	1020-1¼ 452 (500-1¼)
		1020-1½ 452 (500-1½)

NE-3, 19 FEB 2026 to 19 MAR 2026

NE-3, 19 FEB 2026 to 19 MAR 2026