


LOC I-LOW	APP CRS	Rwy Ldg	8400
110.7	012°	TDZE	6649
		Apt Elev	6649

ILS or LOC RWY 1



YELLOWSTONE (WYS)

ADF required. DME required for MUPDE stepdown fix.	MALSR	MISSED APPROACH: Climb to 9000, then climbing right turn to 10100 direct TARGY LOM and hold.
<p>▼ Obtain local altimeter setting on CTAF, when not received procedure</p> <p>▲ NA NA. Inoperative table does not apply to S-LOC 1 Cat A. For inoperative MALSR, increase S-ILS 1 all Cats visibility to 2 3/4 mile.</p>		

AWOS-3P 118.1	SALT LAKE CENTER 132.4 338.3	UNICOM 123.0 (CTAF)
-------------------------	----------------------------------------	-------------------------------

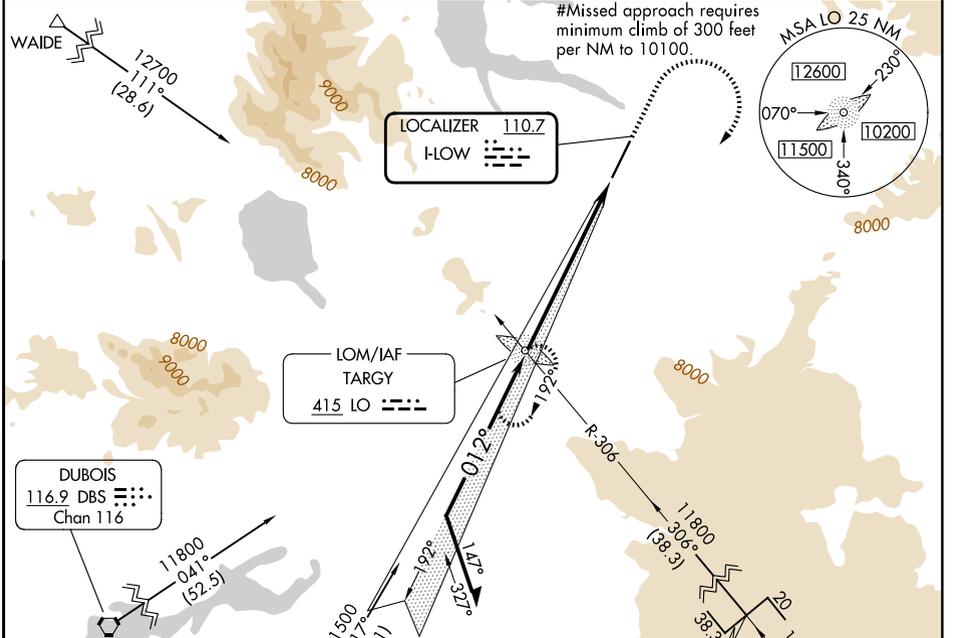

ELEV 6649	D	TDZE 6649
HIRL Rwy 1-19		
REIL Rwy 19		

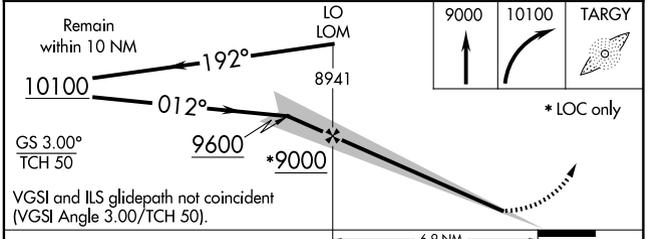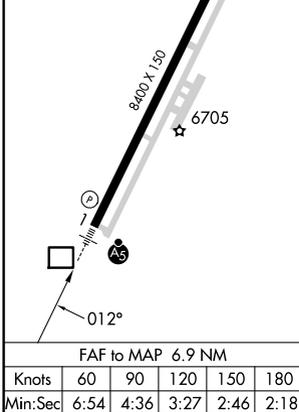

CATEGORY	A	B	C	D
S-ILS 1#		6849-1/2	200 (200-1/2)	
S-ILS 1		7449-2 1/4	800 (800-2 1/4)	
S-LOC 1	7780-1 1/4 1131 (1200-1 1/4)	7780-1 1131 (1200-1)	7780-2 1/2 1131 (1200-2 1/2)	
CIRCLING	7780-1 1/4 1131 (1200-1 1/4)	7780-1 1/2 1131 (1200-1 1/2)	7780-3 1131 (1200-3)	8020-3 1371 (1400-3)

NW-1, 19 FEB 2026 to 19 MAR 2026

NW-1, 19 FEB 2026 to 19 MAR 2026