

WAAS CH 45534 W28A	APP CRS 281°	Rwy Ldg TDZE Apt Elev	8005 40 40
--	------------------------	-----------------------------	---------------------------------------


RNAV (GPS) RWY 28

WALLOPS FLIGHT FACILITY (WAL)



▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Salisbury altimeter setting: increase LPV DA to 343 and all Cats visibility ¼ mile; increase LNAV/VNAV DA to 453 and all Cats visibility ¼ mile; increase all MDA 60 feet and LNAV Cats C/D and Circling Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Salisbury altimeter setting.

MISSED APPROACH: Climb to 600 then climbing right turn to 2000 direct MAGGO and hold.

ASOS 119.175	PATUXENT APP CON★ 127.95 314.0	WALLOPS TOWER★ 126.5 (CTAF) 306.975 (CTAF)	GND CON 127.875 269.325
------------------------	--	--	-----------------------------------

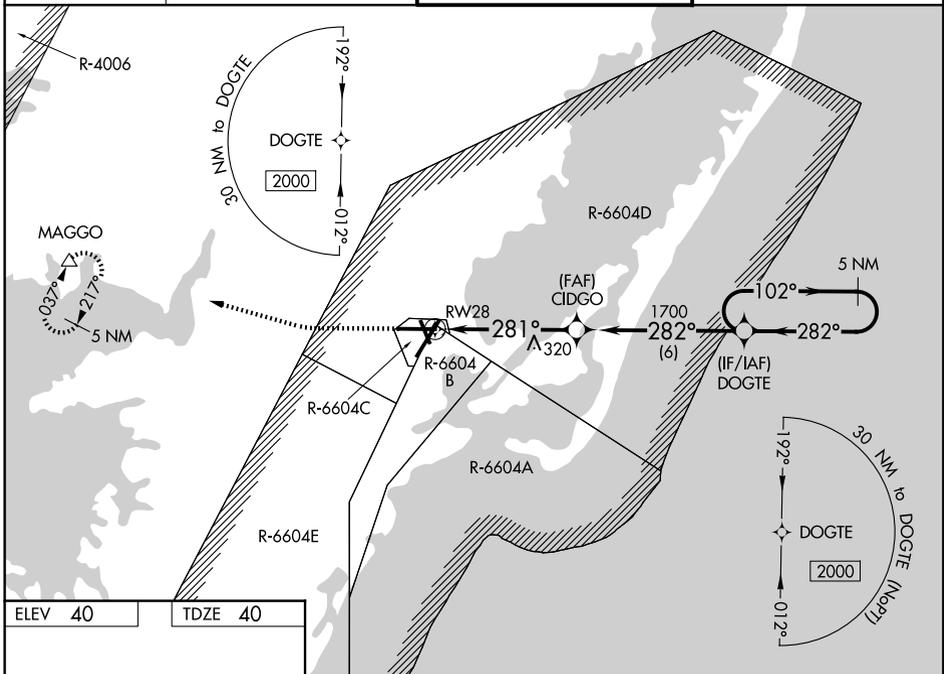

ELEV 40	TDZE 40
---------	---------

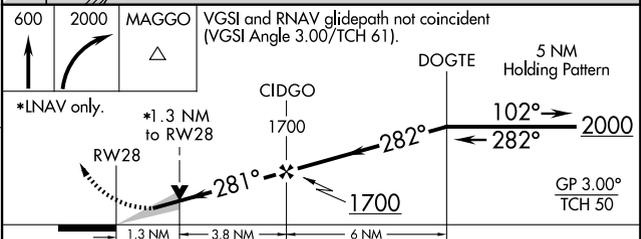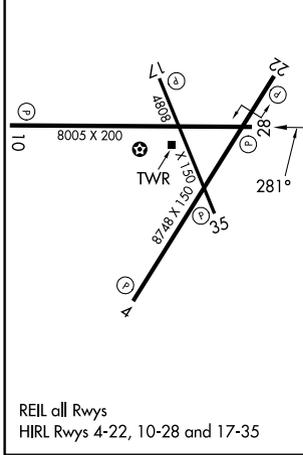

CATEGORY	A	B	C	D
LPV DA		290-3/4	250 (300-3/4)	
LNAV/VNAV DA		400-1 1/8	360 (400-1 1/8)	
LNAV MDA	520-1	480 (500-1)	520-1 3/8	480 (500-1 1/8)
CIRCLING	600-1	560 (600-1)	620-1 1/2	860-2 3/4
			580 (600-1 1/2)	820 (900-2 3/4)

NE-3, 19 FEB 2026 to 19 MAR 2026

NE-3, 19 FEB 2026 to 19 MAR 2026