


WAAS CH 49010 W23A	APP CRS 233°	Rwy Ldg TDZE 661 Apt Elev 668	8002
--	------------------------	---	-------------

RNAV (GPS) RWY 23

MBS INTL (MBS)

T	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inoperative ALS, increase LNAV/VNAV all Cats visibility to RVR 4500. # RVR 1800 authorized with use of FD or AP or HUD to DA.			MALSRL	MISSED APPROACH: Climb to 2300 direct WERDO and hold.	
ATIS 125.925	GREAT LAKES APP CON ★ 126.45 235.625	SAGINAW TOWER ★ 120.1 (CTAF) 0 257.7	GND CON 121.7	CLNC DEL 121.85	UNICOM 122.95	

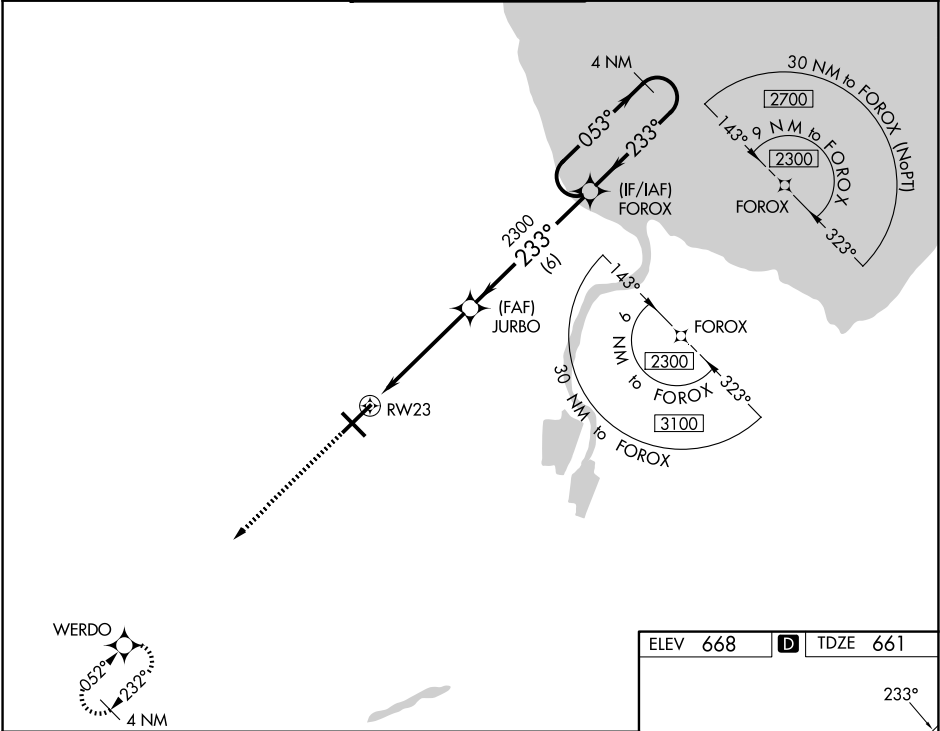

2300 WERDO		JURBO 2300		FOROX 2300		4 NM Holding Pattern	
*LNAV only		*1.1 NM to RW23		RW23		GP 3.00° TCH 54	
1.1		3.9 NM		6 NM			
CATEGORY	A		B		C		D
LPV DA #			861/24		200 (200-½)		
LNAV/VNAV DA			940/24		279 (300-½)		
LNAV MDA	1060/24		399 (400-½)		1060/35		399 (400-¾)
CIRCLING	1080-1 412 (500-1)		1120-1 452 (500-1)		1240-1½ 572 (600-1½)		1240-2 572 (600-2)

