

APP CRS	Rwy Ldg	<b>10000</b>
<b>006°</b>	TDZE	<b>896</b>
	Apt Elev	<b>896</b>

# RNAV (RNP) Z RWY 36R

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

RNP AR APCH - GPS. Authorization required. From ALALE, BIBWY, LINOL, or YOTUL: RF.

For uncompensated Baro-VNAV systems, procedure NA below -13°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.16 all Cats visibility to RVR 5500 and RNP 0.30 all Cats visibility to RVR 6000.

ALSF-2







MISSED APPROACH: Climb to 3000 direct BAIRE and on track 083° to MOAKS and hold.

D-ATIS  
**134.375**

CINCINNATI APP CON  
**119.7 363.15** (090°-269°)  
**123.875 363.15** (270°-089°)

CINCINNATI TOWER  
**118.975 360.85** (18L/36R)  
**118.3** (9/27, 18C/36C)  
**133.325** (18R/36L)

GND CON  
**121.7**

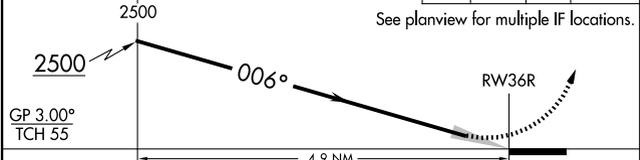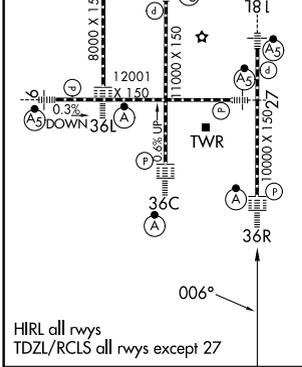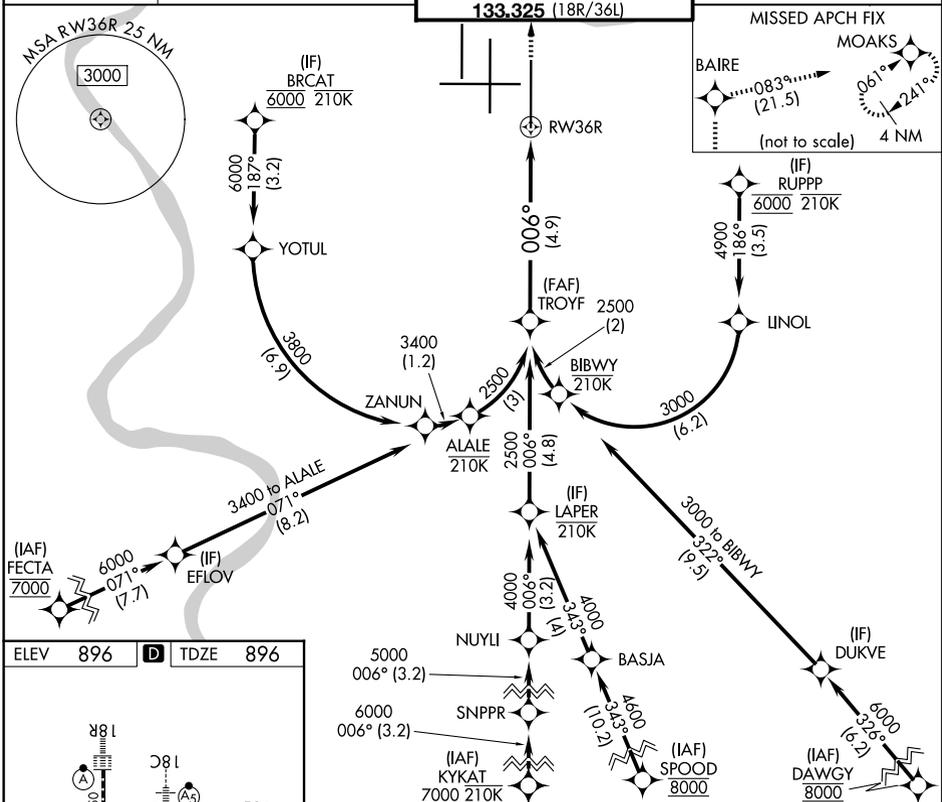

CATEGORY	A	B	C	D
RNP 0.16 DA		1242/30	346 (400- <sup>3</sup> / <sub>8</sub> )	
RNP 0.30 DA		1308/40	412 (500- <sup>3</sup> / <sub>4</sub> )	

SE-1, 19 FEB 2026 to 19 MAR 2026

SE-1, 19 FEB 2026 to 19 MAR 2026