


|  |                        |   |
|--|------------------------|---|
| VOR/DME RDD<br><b>114.35</b><br>Chan <b>90</b> (Y) | APP CRS<br><b>355°</b> | Rwy Ldg <b>6997</b><br>TDZE <b>499</b><br>Apt Elev <b>505</b> |
|--|------------------------|---|

# VOR RWY 34


REDDING RGNL (RDD)

|   |                   |  |
|---|-------------------|--|
| <p><b>▽</b> Inop table does not apply to S-34 Cats C/D.<br/><b>▲</b> MACHL fix minimums: for inop ALS, increase S-34 Cat C/D visibility to 1¾ SM.</p> | <p>MALSR<br/></p> | <p>MISSED APPROACH: Climb to 2100 then climbing right turn to 5300 on heading 090° and on RDD VOR/DME R-044 to ITMOR INT and hold, continue climb-in-hold to 5300.</p> |
|---|-------------------|--|

|                      |                                      |  |                         |                         |
|----------------------|--------------------------------------|--|-------------------------|-------------------------|
| ATIS<br><b>124.1</b> | OAKLAND CENTER<br><b>132.2 350.3</b> | REDDING TOWER ★<br><b>119.8(CTAF) 0 269.25</b> | GND CON<br><b>121.7</b> | UNICOM<br><b>122.95</b> |
|----------------------|--------------------------------------|--|-------------------------|-------------------------|

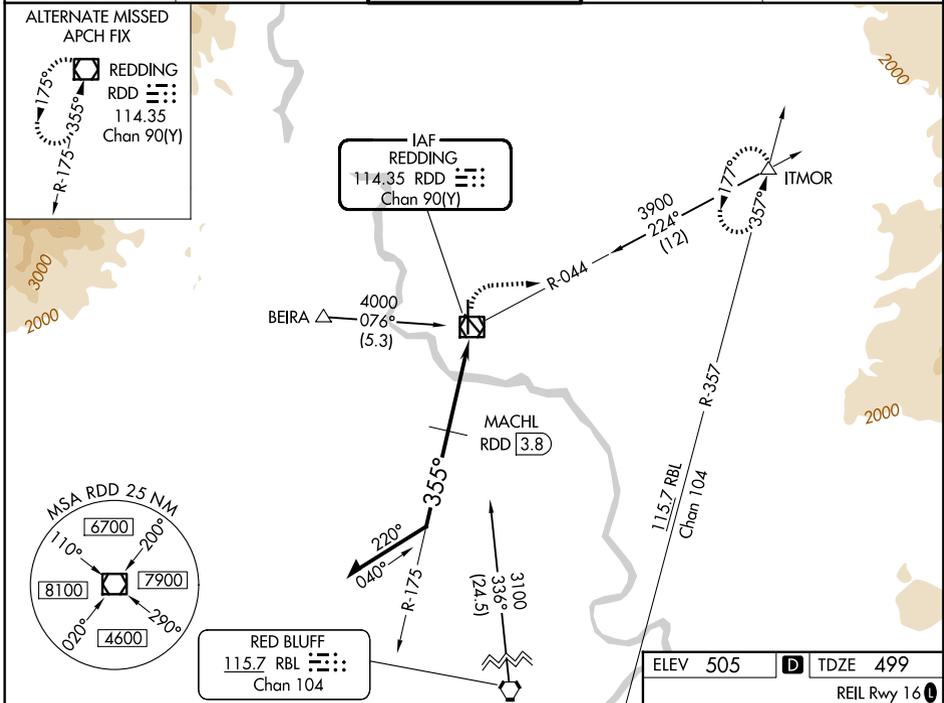

|          |                           |                           |                         |                         |
|----------|---------------------------|---------------------------|-------------------------|-------------------------|
| CATEGORY | A                         | B                         | C                       | D                       |
|          | 1680-¾<br>1181 (1200-¾)   | 1680-1<br>1181 (1200-1)   | 1680-3<br>1181 (1200-3) | 1181 (1200-3)           |
| CIRCLING | 1680-1¼<br>1175 (1200-1¼) | 1680-1½<br>1175 (1200-1½) | 1680-3<br>1175 (1200-3) | 1175 (1200-3)           |
|          | MACHL FIX MINIMUMS        |                           |                         |                         |
| S-34     | 1100-½                    | 601 (600-½)               | 1100-1⅓                 | 601 (600-1⅓)            |
| CIRCLING | 1100-1                    | 595 (600-1)               | 1120-1¼<br>615 (700-1¼) | 1340-2¾<br>835 (900-2¾) |

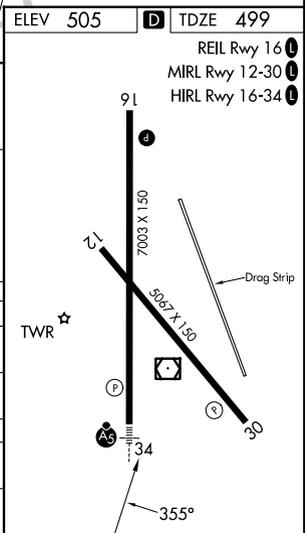

SW-2, 19 FEB 2026 to 19 MAR 2026

SW-2, 19 FEB 2026 to 19 MAR 2026