

WAAS CH 90106 W12A	APP CRS 126°	Rwy Ldg 8587	12R 12L	8831
		TDZE 46	46	44
		Apt Elev 62	62	62

RNAV (GPS) Y RWY 12R


NORMAN Y MINETA SAN JOSE INTL (SJC)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C (31°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inoperative MALSR, increase LNAV/VNAV all Cats visibility to 1 mile and LNAV Cats C/D visibility to 1½ mile.


MALSR
Rwy 12R

MISSED APPROACH: Climb to 4600 direct HIVAK and on track 124° to GILRO and hold.

D-ATIS 126.95	NORCAL APP CON 120.1 290.25	SAN JOSE TOWER ★ 124.0 (CTAF) 257.6	GND CON 121.7	UNICOM 122.95
-------------------------	---------------------------------------	---	-------------------------	-------------------------

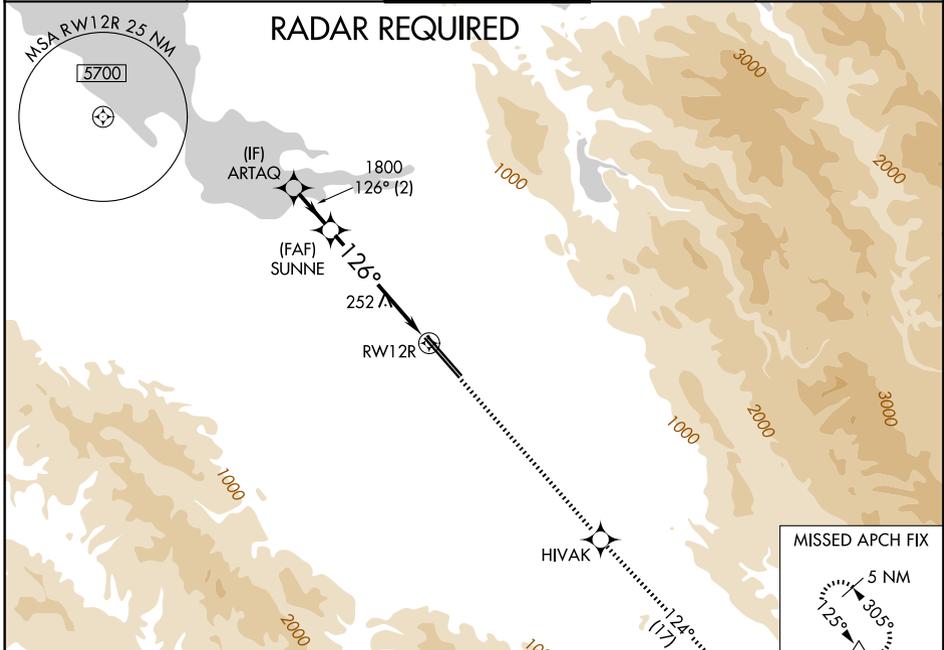

ELEV 62	D	TDZE 12R 46	TDZE 12L 44
---------	----------	-------------	-------------

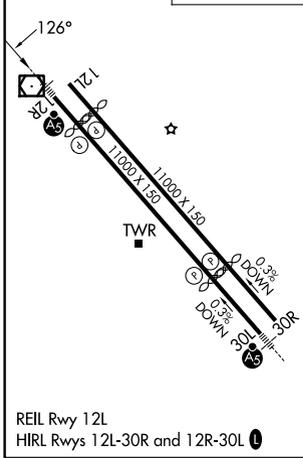

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).

	ARTAQ	SUNNE	4600	HIVAK	tr 124°	GILRO
	1800	1800				
	2 NM		4.1 NM		1.3 NM	
GP 3.00° TCH 58	*1.3 NM to RWY 12R					
	*LNAV only					
CATEGORY	A	B	C	D		
LPV DA	246-½		200 (200-½)			
LNAV/VNAV DA	371-⅝ 325 (400-⅝)		371-1 325 (400-1)			
LNAV MDA	520-½ 474 (500-½)		520-1 474 (500-1)			
SIDESTEP 12L	520-1 476 (500-1)		520-1½ 476 (500-1½)		520-2 476 (500-2)	

SW-2, 19 FEB 2026 to 19 MAR 2026

SW-2, 19 FEB 2026 to 19 MAR 2026