

WAAS CH 82038 W18A	APP CRS 180°	Rwy Idg 5298 TDZE 680 Apt Elev 682
--	------------------------	---

RNAV (GPS) RWY 18

DECATUR (DEC)


RNP APCH - GPS.

- ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.

▲ Rwy 18 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 2300 direct
OKEVE and hold.

ATIS 126.35	CHAMPAIGN APP CON ★ 132.85 290.225	DECATUR TOWER ★ 118.9(CTAF) 291.775	GND CON 121.75 291.775	UNICOM 122.95
-----------------------	--	---	----------------------------------	-------------------------

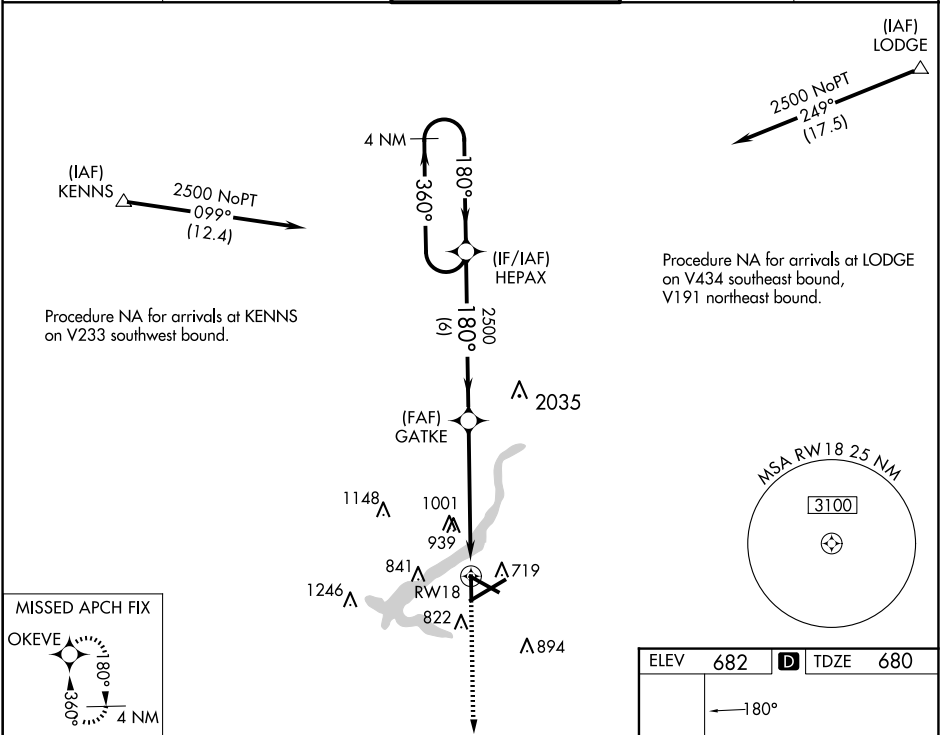

4 NM Holding Pattern		HEPAX		GATKE		2300 ↑		OKEVE 	
2500 ← 360° 180° →		2500		2500		1.6 NM to RW18		RW18 	
GP 3.00° TCH 54		6 NM		4 NM		1.6 NM			
CATEGORY	A	B	C	D					
LPV DA	952-7/8		272 (300-7/8)						
LNAV/ VNAV DA	1279-17/8		599 (600-17/8)						
LNAV MDA	1240-1	560 (600-1)	1240-15/8	560 (600-15/8)					
 CIRCLING	1240-1	558 (600-1)	1360-2 678 (700-2)	1360-2 1/4 678 (700-2 1/4)					

