

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 50310 W01A | APP CRS 007° | Rwy Ldg TDZE Apt Elev | 9001 685 690 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 1


ALPENA COUNTY RGNL (APN)

RNP APCH - GPS.



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using PZQ altimeter setting. For inop ALS, increase LPV all Cats visibility to 7/5 SM, LNAV/VNAV all Cats visibility to 1 SM and LNAV Cats C/D visibility to 1 3/5 SM. When local altimeter setting not received, use PZQ altimeter setting and increase LPV DA to 1029 feet and all visibilities 1/5 SM; increase LNAV/VNAV DA to 1084 feet; increase all MDA's 60 feet. For inop ALS when using PZQ altimeter setting, increase LPV all Cats visibility to 1 SM.

MALSR  MISSED APPROACH: Climb to 3500 direct HIMVO and on track 307° to RABBO and hold.

| | | | | |
|-------------------------------|--|--|-------------------------------|-------------------------|
| ATIS 120.675 327.05 | ALPENA APP CON ★ 128.425 379.3 | ALPENA TOWER ★ 121.35 (CTAF) 0 318.1 | GND CON 121.9 275.8 | UNICOM 122.95 |
|-------------------------------|--|--|-------------------------------|-------------------------|

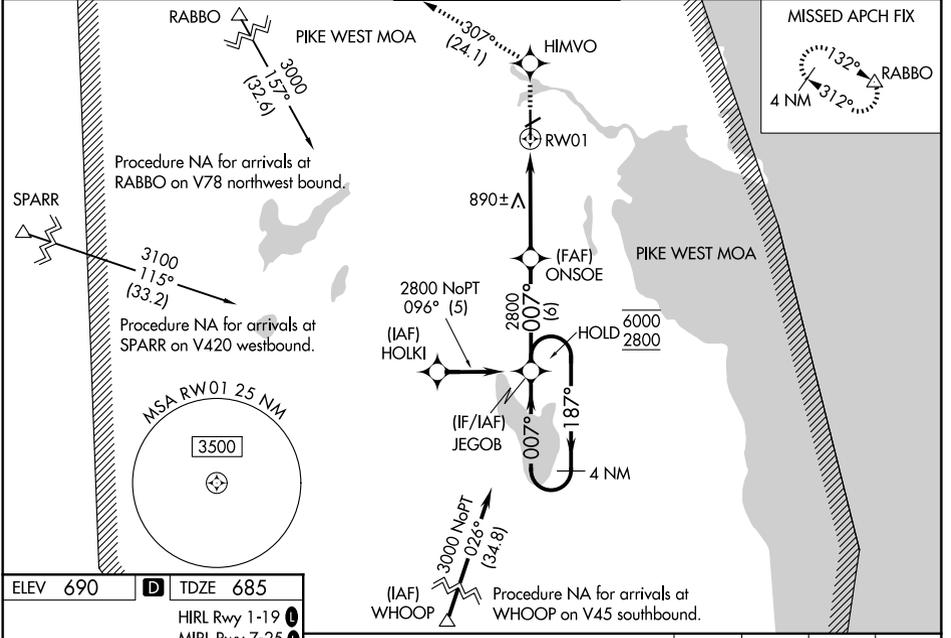

| | |
|--|-------------------|
| ELEV 690 | D TDZE 685 |
| HIRL Rwy 1-19  | |
| MIRL Rwy 7-25  | |
| REIL Rwys 7, 19 and 25  | |

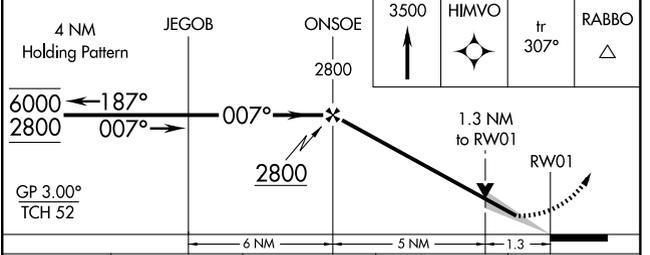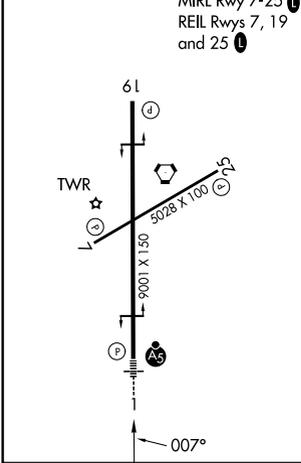

| CATEGORY | A | B | C | D |
|--------------|----------|---------------|-------------------------------|-----------------------|
| LPV DA | | 974-1/2 | 289 (300-1/2) | |
| LNAV/VNAV DA | | 1029-5/8 | 344 (400-5/8) | |
| LNAV MDA | 1160-1/2 | 475 (500-1/2) | 1160-1 | 475 (500-1) |
| CIRCLING | 1160-1 | 470 (500-1) | 1220-1 1/2 530 (600-1 1/2) | 1300-2 610 (700-2) |

EC-1, 19 FEB 2026 to 19 MAR 2026

EC-1, 19 FEB 2026 to 19 MAR 2026