

| | | |
|--|------------------------|--|
| LOC/DME I-CHO 111.7 Chan 54 | APP CRS 030° | Rwy Ldg 6801 TDZE 640 Apt Elev 640 |
|--|------------------------|--|

ILS or LOC RWY 3




CHARLOTTESVILLE-ALBEMARLE (CHO)

⚠ VDP NA when using Orange altimeter setting. When local altimeter setting not received, use Orange altimeter setting and increase S-ILS 3 DA to 911 and all MDA 80 feet;
⚠ increase S-LOC 3 JITIV fix minimums Cats C/D, S-LOC 3 Cats C/D, Circling Cats C/D, and JITIV fix minimums Circling Cats C/D visibility 1/2 SM. For inop ALS when using Orange altimeter setting, increase S-ILS 3 all Cats visibility to 2/3 SM, S-LOC 3 Cats C/D visibility to 2 SM, and S-LOC 3 JITIV fix minimums Cats C/D visibility to 1/2 SM.



MISSED APPROACH:
Climb to 2000 then climbing right turn to 4000 direct GVE VORTAC and hold.

| | | | | |
|------------------------|--|--|---------------------------------|-------------------------|
| ATIS 118.425 | POTOMAC APP CON 132.85 323.125 | CHARLOTTESVILLE TOWER ★ 124.5 (CTAF) 338.275 | GND CON 121.9 338.275 | UNICOM 122.95 |
|------------------------|--|--|---------------------------------|-------------------------|

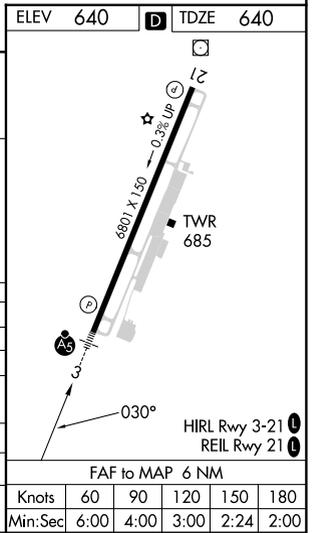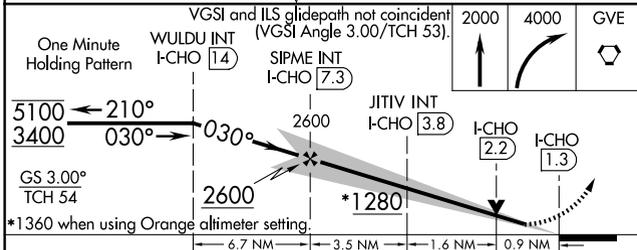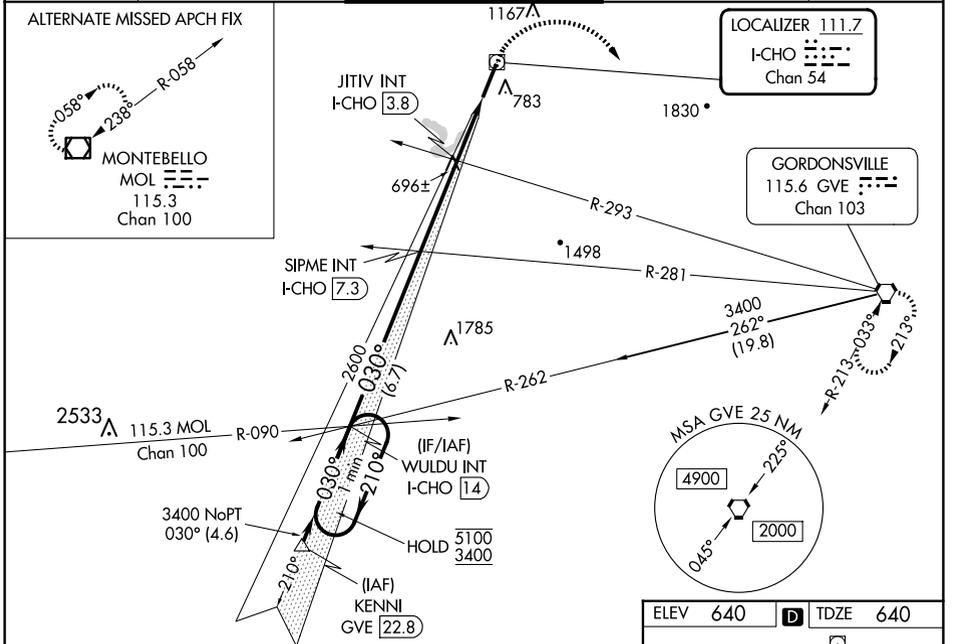

| CATEGORY | A | B | C | D |
|---|----------|---------------|-------------------------------|-------------------------------|
| S-ILS 3 | | 840-1/2 | 200 (200-1/2) | |
| S-LOC 3 | 1280-1/2 | 640 (700-1/2) | 1280-1 3/8 | 640 (700-1 3/8) |
| C CIRCLING | 1280-1 | 640 (700-1) | 1500-2 1/2 860 (900-2 1/2) | 1500-2 3/4 860 (900-2 3/4) |
| JITIV FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED) | | | | |
| S-LOC 3 | 980-1/2 | 340 (400-1/2) | 980-5/8 | 340 (400-5/8) |
| C CIRCLING | 1100-1 | 460 (500-1) | 1500-2 1/2 860 (900-2 1/2) | 1500-2 3/4 860 (900-2 3/4) |

| | |
|----------|--------------------------|
| ELEV 640 | TDZE 640 |
| Knots | 60 90 120 150 180 |
| Min:Sec | 6:00 4:00 3:00 2:24 2:00 |