


WAAS CH 97431 W01A	APP CRS 013°	Rwy Ldg TDZE 1180 Apt Elev 1205
--	------------------------	---

RNAV (GPS) RWY 1
MARQUETTE/SAWYER RGNL (SAW)

RNP APCH - GPS.	MALSR 	MISSED APPROACH: Climb to 3500 direct ZUCTI and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM.		

AWOS-3PT 118.375	MINNEAPOLIS CENTER 119.1 290.2	SAWYER TOWER ★ 119.975 (CTAF) 0	GND CON 121.65	UNICOM 122.7
----------------------------	--	---	--------------------------	------------------------

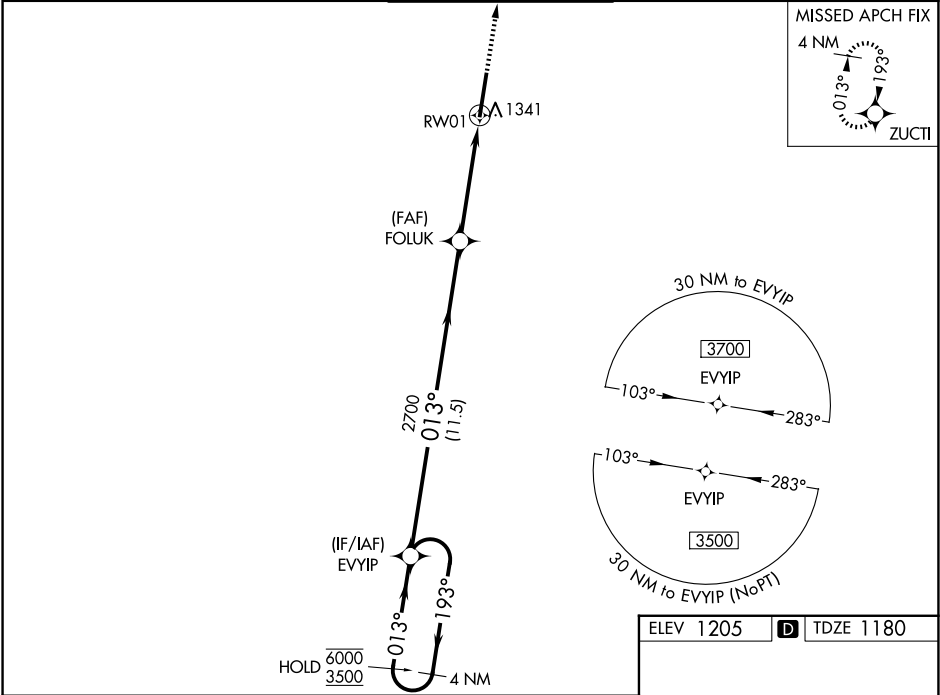

4 NM Holding Pattern		3500		ZUCTI	
		2700		1.2 NM to RW01	
GP 3.00° TCH 50		11.5 NM		3.5 NM	
1.2 NM		1.2 NM		RW01	
CATEGORY	A	B	C	D	
LPV DA	1380-½		200 (200-½)		
LNAV/ VNAV DA	1503-½		323 (300-½)		
LNAV MDA	1600-½	420 (400-½)	1600-¾	420 (400-¾)	
CIRCLING	1680-1	475 (500-1)	1820-1¾ 615 (700-1¾)	1820-2 615 (700-2)	

