

WAAS CH 69401 W17A	APP CRS 175°	Rwy Ldg 6002 TDZE 541 Apt Elev 548
--	------------------------	---


RNAV (GPS) RWY 17
COX FLD (PRX)

RNP APCH - GPS.

▼ Baro-VNAV and VDP NA when using SLR altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. When local altimeter setting not received, use SLR altimeter setting and increase LPV DA to 868 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1016 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH:
Climb to 2200 direct
CUKBO and hold.

AWOS-3PT 119.675	FORT WORTH CENTER 124.875 370.95	UNICOM 122.975 (CTAF) 0
----------------------------	--	-----------------------------------

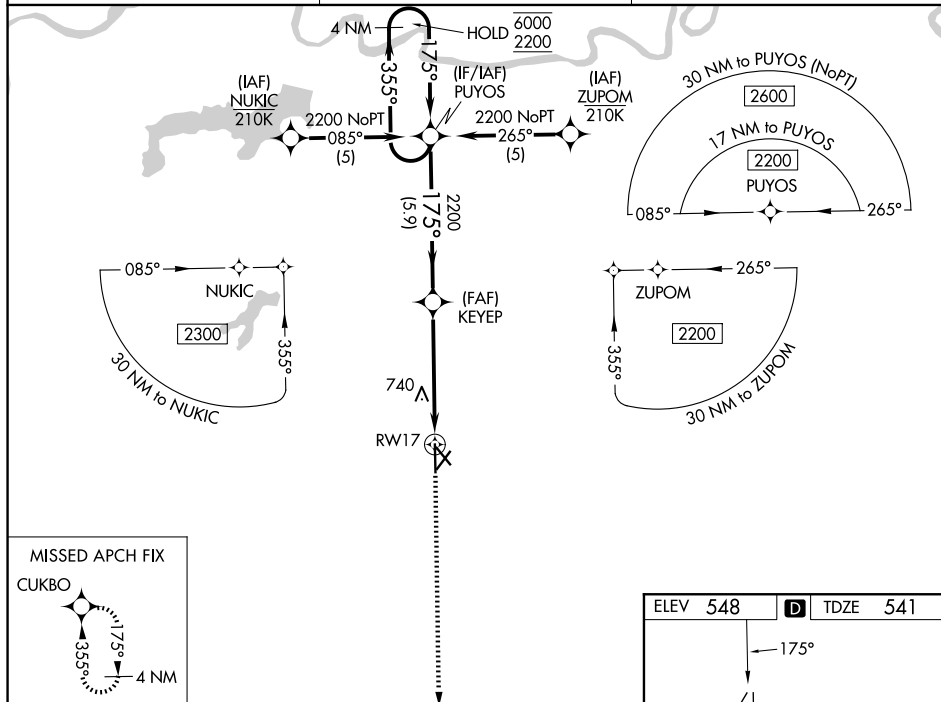

4 NM Holding Pattern

PUYOS

KEYEP 2200

2200

1.4 NM to RW17

RW17

5.9 NM

3.6 NM

1.4 NM

355°

175°

GP 3.00°
TCH 40

CUKBO

CATEGORY	A	B	C	D
LPV DA		791- ³ / ₄	250 (300- ³ / ₄)	
LNAV/VNAV DA		939-1 ¹ / ₈	398 (400-1 ¹ / ₈)	
LNAV MDA	1040-1	499 (500-1)	1040-1 ³ / ₈	499 (500-1 ³ / ₈)
CIRCLING	1060-1	512 (600-1)	1100-1 ¹ / ₂ 552 (600-1 ¹ / ₂)	1220-2 ¹ / ₄ 672 (700-2 ¹ / ₄)

