


WAAS CH 45705 W22A	APP CRS 218°	Rwy Idg TDZE Apt Elev	7098 753 768
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 22
QUINCY RGNL-BALDWIN FLD (UIN)

RNP APCH - GPS.	MISSED APPROACH: Climb to 1300 then climbing left turn to 2400 direct FANUT and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. Baro-VNAV and VDP NA when using Pittsfield altimeter setting. When local altimeter setting not received, use Pittsfield altimeter setting and increase LPV DA to 1073 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 1120 feet and all visibilities ½ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ½ SM.	

ASOS 121.425	KANSAS CITY CENTER 126.225 317.775	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

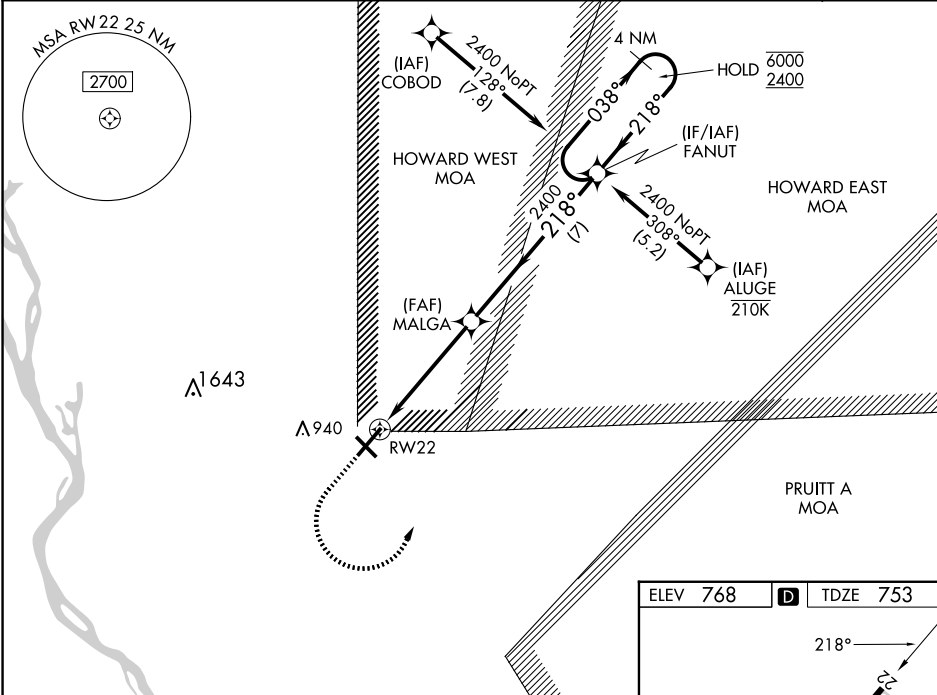

1300	2400	FANUT	MALGA	FANUT	4 NM Holding Pattern
1.2 NM to RW22	1.2 NM	3.8 NM	7 NM	218°	038°
2400	2400	2400	2400	2400	6000
GP 3.00°	TCH 46				
CATEGORY	A	B	C	D	
LPV DA		1003-¾	250 (300-¾)		
LNAV/VNAV DA		1050-⅞	297 (300-⅞)		
LNAV MDA	1180-1	427 (500-1)	1180-1¼	427 (500-1¼)	
CIRCLING	1180-1 412 (500-1)	1220-1 452 (500-1)	1240-1½ 472 (500-1½)	1320-2 552 (600-2)	

