

LOC/DME I-TYN <b>110.9</b> Chan <b>46</b>	APP CRS <b>036°</b>	Rwy Ldg <b>8000</b> TDZE <b>40</b> Apt Elev <b>42</b>
---	------------------------	---

# ILS or LOC RWY 4R


LAFAYETTE RGNL/PAUL FOURNET FLD (LFT)

DME required for procedure entry and for LOC only.

**⚠** Rwy 4R helicopter visibility reduction below 3/4 SM NA. VDP NA when using Acadiana Rgnl altimeter setting. When local altimeter setting not received, use Acadiana Rgnl altimeter setting and increase all DA 29 feet and all MDA 40 feet, increase S-ILS 4R and S-LOC 4R visibility all Cats 1/8 SM, Circling visibility Cat C/D 1/4 SM.

MISSED APPROACH: Climb to 2000 on LFT R-035 to BEDDY INT/LFT 18.9 DME and hold.

ATIS <b>134.05</b>	LAFAYETTE APP CON * <b>121.1 363.0</b>	LAFAYETTE TOWER * <b>118.5 (CTAF) 257.8</b>	GND CON <b>121.8</b>	UNICOM <b>122.95</b>
-----------------------	---	--	-------------------------	-------------------------


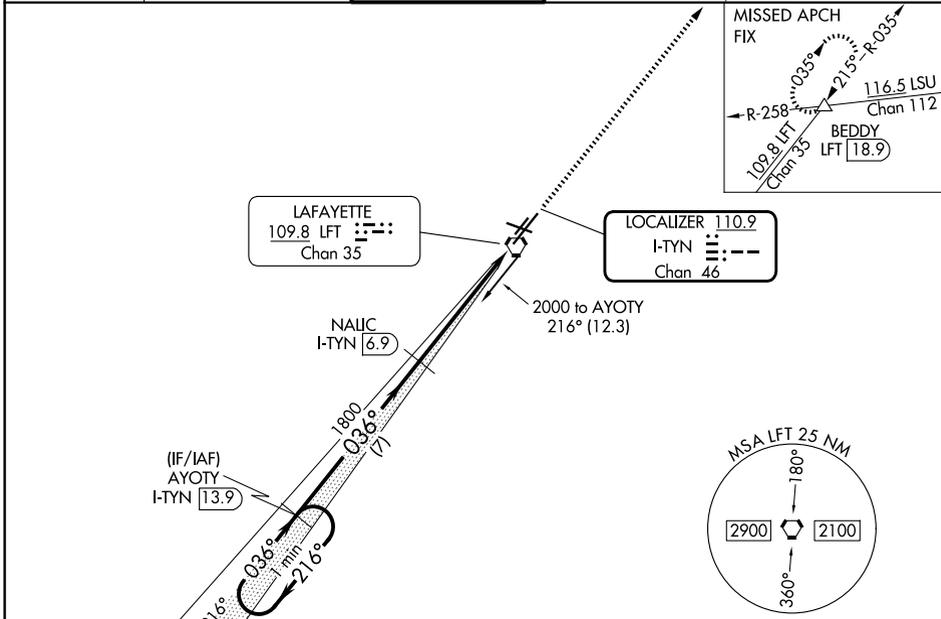


SC-4, 19 FEB 2026 to 19 MAR 2026

SC-4, 19 FEB 2026 to 19 MAR 2026

ELEV <b>42</b>	<b>D</b> TDZE <b>40</b>
----------------	-------------------------

REIL Rwy 4L, 4R, 11, 22R and 29  
MIRL Rwy 4L-22R and 11-29  
HIRL Rwy 4R-22L

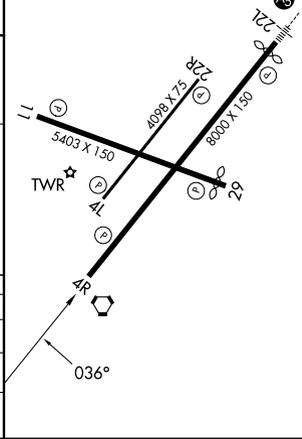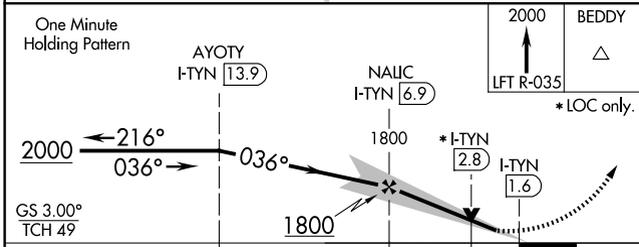

CATEGORY	A	B	C	D
S-ILS 4R	316-7/8		276 (300-7/8)	
S-LOC 4R	500-1	460 (500-1)	500-13/8	460 (500-13/8)
CIRCLING	540-1 498 (500-1)	580-1 538 (600-1)	700-13/4 658 (700-13/4)	700-2 658 (700-2)