


LOC/DME I-GAD 108.35 Chan 20(Y)	APP CRS 244°	Rwy Ldg TDZE Apt Elev	6802 560 569
--	------------------------	-----------------------------	---

ILS or LOC RWY 24
NORTHEAST ALABAMA RGNL (GAD)


▼ DME required. VDP NA when using Annniston altimeter setting. When local altimeter setting not received, use Annniston altimeter setting and increase DA to 845 feet and all visibilities ¼ SM: increase all MDAs 80 feet and visibility S-LOC Cats C and D ¼ SM and Circling Cat C ½ SM.

MISSED APPROACH: Climb to 3600 on GAD VOR/DME R-231 to STAMP/GAD 10 DME and hold, continue climb-in-hold to 3600.



AWOS-3PT 127.825	BIRMINGHAM APP CON 125.45 279.65	CLNC DEL 120.05 257.7	UNICOM 122.725 (CTAF) 0
----------------------------	--	---------------------------------	-----------------------------------



DME REQUIRED

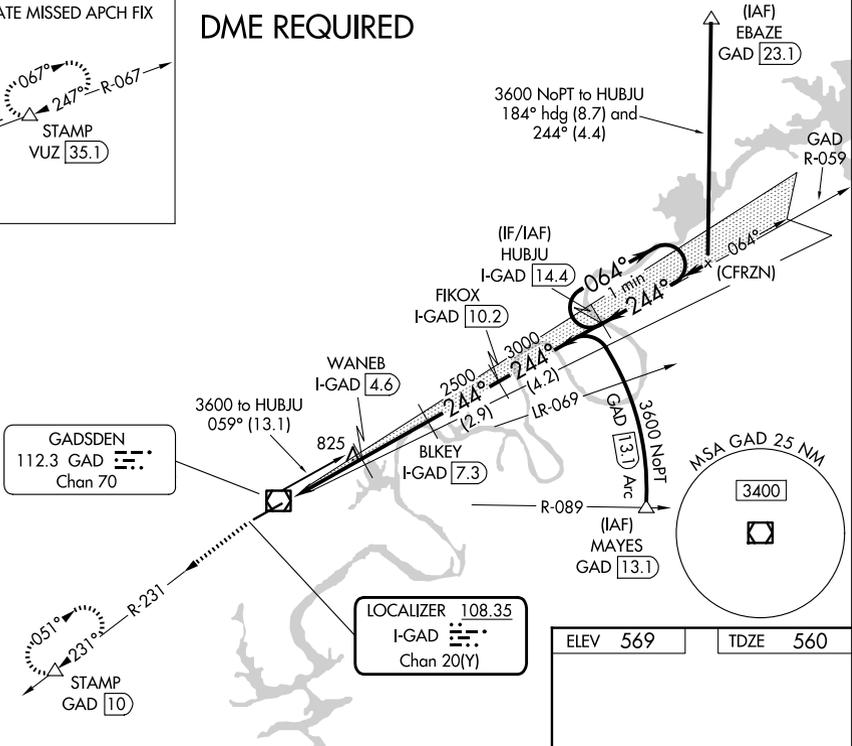

ELEV 569	TDZE 560
----------	----------

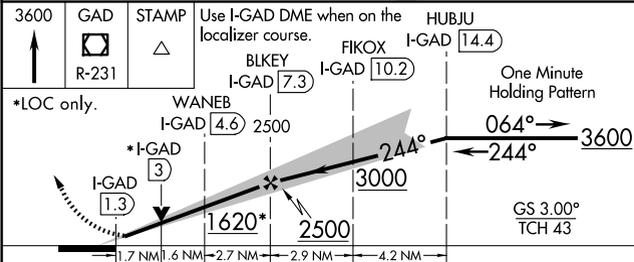

CATEGORY	A	B	C	D
S-ILS 24		779-¾	219 (300-¾)	
S-LOC 24	1140-1	580 (600-1)	1140-1¾	580 (600-1¾)
CIRCLING	1140-1	571 (600-1)	1440-2½	1680-3
			871 (900-2½)	1111 (1200-3)

HIRL Rwy 6-24 0
REIL Rwy 6 and 24 0