


WAAS CH 65905 W24A	APP CRS 244°	Rwy Ldg TDZE Apt Elev	6802 560 569
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 24

NORTHEAST ALABAMA RGNL (GAD)

RNP APCH-GPS.		MISSED APPROACH: Climb to 3600 direct CEGON and on track 221° to STAMP and hold, continue climb-in-hold to 3600.	
▼	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.		
▲	When local altimeter setting is not received, use Annonisum altimeter setting and increase LPV DA to 847 feet and all visibilities 1/8 SM; increase LNAV/VNAV DA to 1082 feet and all visibilities 1/8 SM; increase all MDAs 80 feet and LNAV visibility Cat C/D 1/4 SM, and Circling visibility Cat C 1/2 SM. Baro-VNAV and VDP NA when using Annonisum altimeter setting.		
AWOS-3PT	BIRMINGHAM APP CON	CLNC DEL	UNICOM
127.825	125.45 279.65	120.05 257.7	122.725 (CTAF) 0

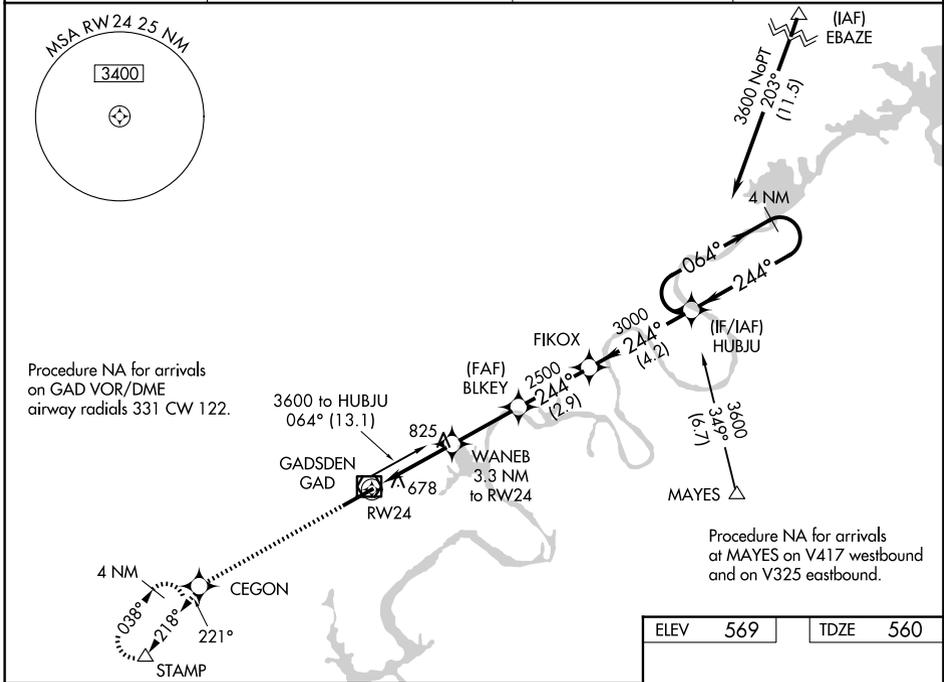

3600	CEGON	STAMP	HUBJU 4 NM Holding Pattern	
↑	✦	tr 221° △		
			BLKEY	FIKOX
			WANE 3.3 NM to RWY24	3000
			1.7 NM to RWY24	2500
			1620	2500
			1.7 NM	1.6 NM
			2.7 NM	2.9 NM
			4.2 NM	
CATEGORY	A	B	C	D
LPV DA		781-3/4	221 (300-3/4)	
LNAV/VNAV DA		1016-1 1/8	456 (500-1 1/8)	
LNAV MDA	1140-1	580 (600-1)	1140-1 1/8	580 (600-1 1/8)
CIRCLING	1140-1	571 (600-1)	1440-2 1/2 871 (900-2 1/2)	1680-3 1111 (1200-3)

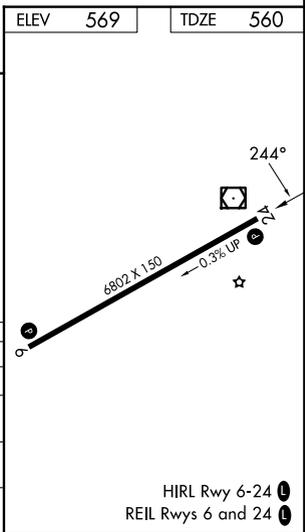

SE-4, 19 FEB 2026 to 19 MAR 2026

SE-4, 19 FEB 2026 to 19 MAR 2026