

WAAS CH 40420 W18A	APP CRS 178°	Rwy Idg 5998 TDZE 206 Apt Elev 206
--	------------------------	---

RNAV (GPS) RWY 18
PINEBLUFF RGNL/GRIDER FLD (PBF)

RNP APCH - GPS.

T Baro-VNAV and VDP NA when using Stuttgart altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. When local altimeter setting not received, use Stuttgart altimeter setting and increase LPV DA to 534 feet; increase LNAV/VNAV DA to 723 feet and all visibilities ½ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat C/D ¼ SM. For inop ALS, increase LNAV Cats A/B visibility to 1 SM and Cats C/D visibility to 1½ SM. For inop ALS when using Stuttgart altimeter setting, increase LPV all Cats visibility to 1 SM; increase LNAV/VNAV all Cats visibility to 1½ SM; increase LNAV Cats C/D visibility 1½ SM.

MALSR



MISSED APPROACH:
Climb to 2000 direct
REROY and hold.

ASOS 120.775	LITTLE ROCK APP CON 119.85 353.6	CLNC DEL 119.85	UNICOM 123.0 (CTAF) 0
-----------------	-------------------------------------	--------------------	--------------------------

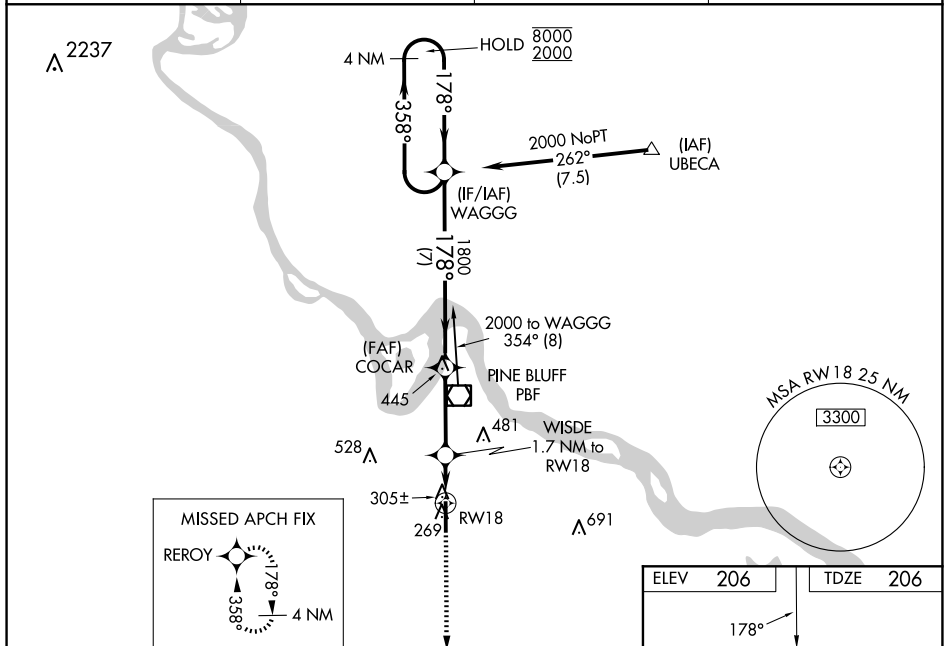


Diagram illustrating a 4 NM Holding Pattern. The pattern is defined by a 1.1 NM to RW18, a 0.6 NM to RW18, and a 3.2 NM to RW18. The holding pattern is 4 NM, with a 358° heading and a 178° heading. The pattern is labeled "GP 3.00° TCH 52".