

SAN DIEGO, CALIFORNIA

RNAV (GPS) RWY 24R

MIRAMAR MCAS (JOE FOSS FLD) (KNKX)


WAAS CH 61450 W24B	APCH CRS 243°	Rwy Idg 12,000 TDZE 475 Arpt Elev 477
--------------------------	------------------	---

[USN]

RNP APCH ▽ *** When ALS inop, increase vis to ¾ mile. *** When ALS inop, increase vis to ¾ mile. *** When ALS inop, increase CAT AB vis to 1 mile, CAT CD vis to 1¼ miles.			ALSF-1  MISSED APPROACH: Climb to 3000 direct HOTIG, 288° track to REDIN and hold.			
ATIS ★ 352.0 133.475	SOCAL APP CON 132.2 269.1	FOSS TOWER ★ 135.2 298.925 0	GND CON 128.625 307.325	CLNC DEL 125.975 254.325	LA CENTER 291.7	ASR/ PAR

For uncompensated Baro-VNAV systems, procedure NA below -15°C (5°F) or above 54°C (130°F).

CAUTION: Intermediate deceleration segment descent gradient 309 FPM is greater than 150 FPM.

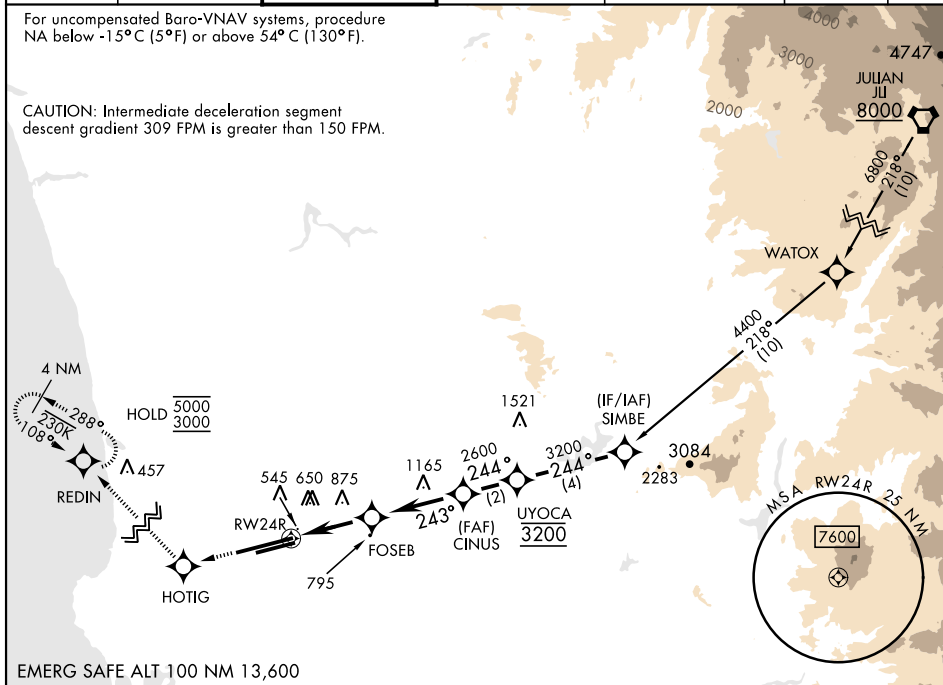

EMERG SAFE ALT 100 NM 13,600

VGSJ and RNAV glidepath not coincident
(VGSJ Angle 3.00/TCH 57).

CATEGORY	A	B	C	D
LPV DA *	675-½	200	(200-½)	
RNAV/VNAV DA **	725-½	250	(300-½)	
*** RNAV MDA	1060-½	585 (600-½)	1060-1¼	585 (600-1¼)
CIRCLING	1060-1	583 (600-1)	1060-1¾ 583 (600-1¾)	1180-2¼ 703 (800-2¼)

HIRL Rwy 6L-24R
HIRL Rwy 6R-24L

SAN DIEGO, CALIFORNIA

32°52'N-117°09'W

MIRAMAR MCAS (JOE FOSS FLD) (KNKX)

Amdt 4 27JAN22

RNAV (GPS) RWY 24R

SW-3, 19 FEB 2026 to 19 MAR 2026

SW-3, 19 FEB 2026 to 19 MAR 2026