

WAAS CH 86212 W22A	APP CRS 219°	Rwy Ldg TDZE 322 Apt Elev 322	8001
--	------------------------	---	-------------

RNAV (GPS) RWY 22

MILLINGTON/MEMPHIS (NQA)

RNP APCH - GPS.


- ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.
- ▲ For inop ALS, increase LPV Cat E visibility to ¾ SM, LNAV/VNAV all Cats visibility to 1½ SM, and LNAV Cat E visibility to 1¾ SM.

MALSR



MISSED APPROACH:
Climb to 840 then
climbing right turn to
2500 direct ZIVNY
and hold.


AWOS-3 118.925	MEMPHIS APP CON 119.1 291.6 125.8 338.3 (176°-355°) (356°-175°)	MILLINGTON TOWER ★ 120.25 (CTAF) 0 340.2	GND CON 121.375	UNICOM 122.95
--------------------------	--	--	---------------------------	-------------------------

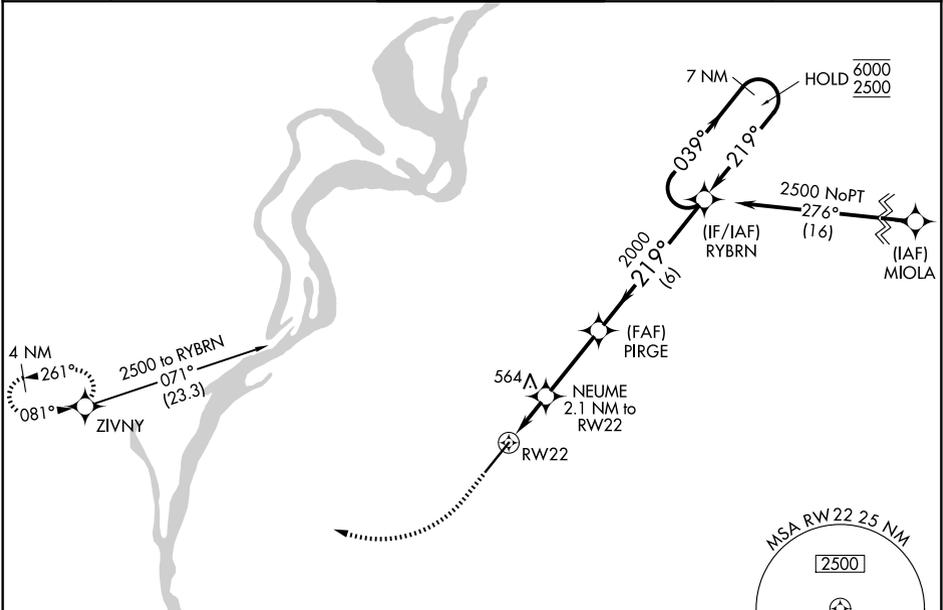


SE-1, 19 FEB 2026 to 19 MAR 2026

SE-1, 19 FEB 2026 to 19 MAR 2026

ELEV 322	TDZE 322
----------	----------



840	2500	ZIVNY	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 67).	7 NM Holding Pattern
-----	------	-------	--	----------------------

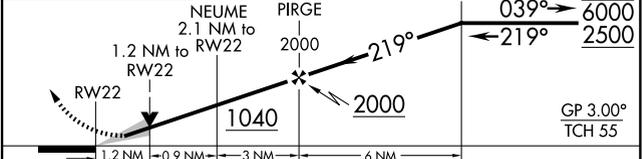

CATEGORY	A	B	C	D	E
LPV DA	522-½		200 (200-½)		
LNAV/VNAV DA	784-1		462 (500-1)		
LNAV MDA	780-½	458 (500-½)	780-¾	458 (500-¾)	
CIRCLING	800-1	820-1	920-1½	960-2	960-2¼
	478 (500-1)	498 (500-1)	598 (600-1½)	638 (700-2)	638 (700-2¼)

REIL Rwy 22
REIL Rwy 4
HIRL Rwy 4-22