

WAAS
CH **72919**
W14A

APP CRS
145°

Rwy Idg
TDZE **2119**
Apt Elev **2143**

RNAV (GPS) RWY 14

BRADFORD RGNL (BFD)


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 53°C (129°F). Baro-VNAV and VDP NA when using St. Marys altimeter setting. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use St. Marys altimeter setting: increase LPV DA to 2454 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 2602 feet and all visibilities ½ SM; increase all MDAs 100 feet and Circling Cat C visibility ½ SM, and LNAV Cats C and D and Circling Cat D ¼ SM.

MISSED APPROACH:

Climb to 4500 direct NIMEE and hold.

ASOS 133.825	CLEVELAND CENTER 124.325 353.85	UNICOM 123.075 (CTAF) 0
------------------------	---	-----------------------------------

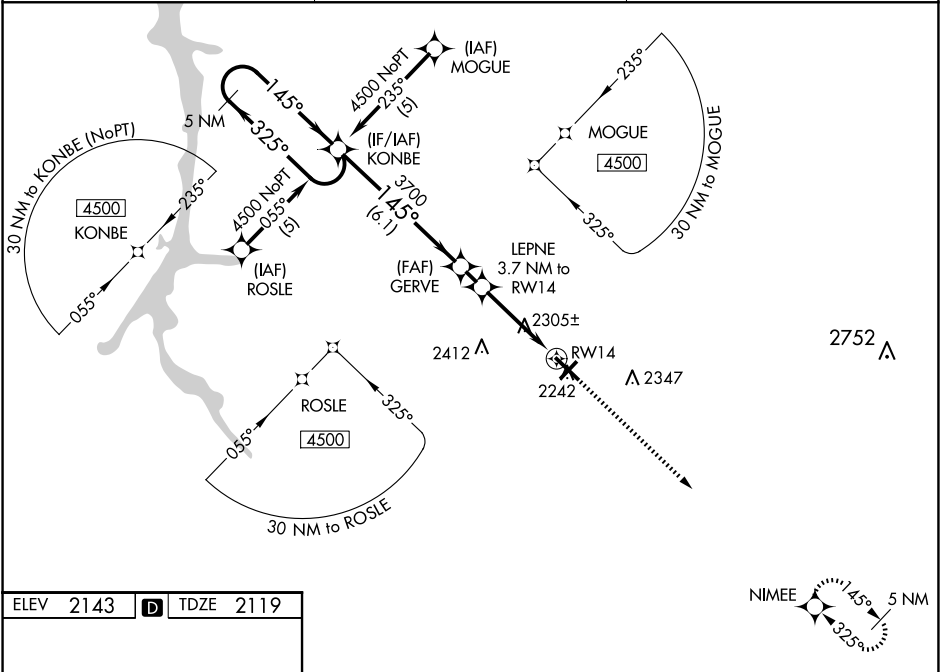

ELEV 2143

D

TDZE 2119

MIRL Rwy 5-23 0

HIRL Rwy 14-32 0

REIL Rws 5, 14 and 23 0

5 NM Holding Pattern		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 42).			4500	NIMEE
KONBE		GERVE			LEPNE	*LNAV only.
4500 ← 325° 145° →		3700			3.7 NM to RW14	
GP 3.00° TCH 55		*3340			*1.3 NM to RW14	RW14
		6.1 NM		1.1 NM	2.4 NM	1.3 NM
CATEGORY		A	B	C	D	
LPV DA	2369-1			250 (300-1)		
LNAV/VNAV DA	2517-1 ³ / ₈			398 (400-1 ³ / ₈)		
LNAV MDA	2560-1 441 (500-1)			2560-1 ³ / ₈ 441 (500-1 ³ / ₈)		
CIRCLING	2620-1 477 (500-1)			2720-1 ¹ / ₂ 577 (600-1 ¹ / ₂)		2760-2 617 (700-2)