

WAAS CH <b>73036</b> <b>W12A</b>	APP CRS <b>115°</b>	Rwy Ldg TDZE Apt Elev	<b>6000</b> <b>1621</b> <b>1648</b>
--	------------------------	-----------------------------	---


# RNAV (GPS) RWY 12

BROOKINGS RGNL (BKK)

**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Pipestone altimeter setting and increase all DA 81 feet and all MDA 100 feet; increase LNAV/VNAV all Cats visibility ¼ mile; LNAV Cts C and D visibility ⅜ mile; Circling Cts C and D visibility ¼ mile. Baro-VNAV and VDP NA when using Pipestone altimeter setting. Night landing Rwy 17 NA.

**MALS**  
  
**MISSED APPROACH:**  
 Climb to 3500 direct REEKY and hold.



AWOS-3PT <b>119.925</b>	MINNEAPOLIS CENTER <b>132.05 317.4</b>	GCO <b>121.725</b>	UNICOM <b>123.0 (CTAF)</b>
----------------------------	---	-----------------------	-------------------------------

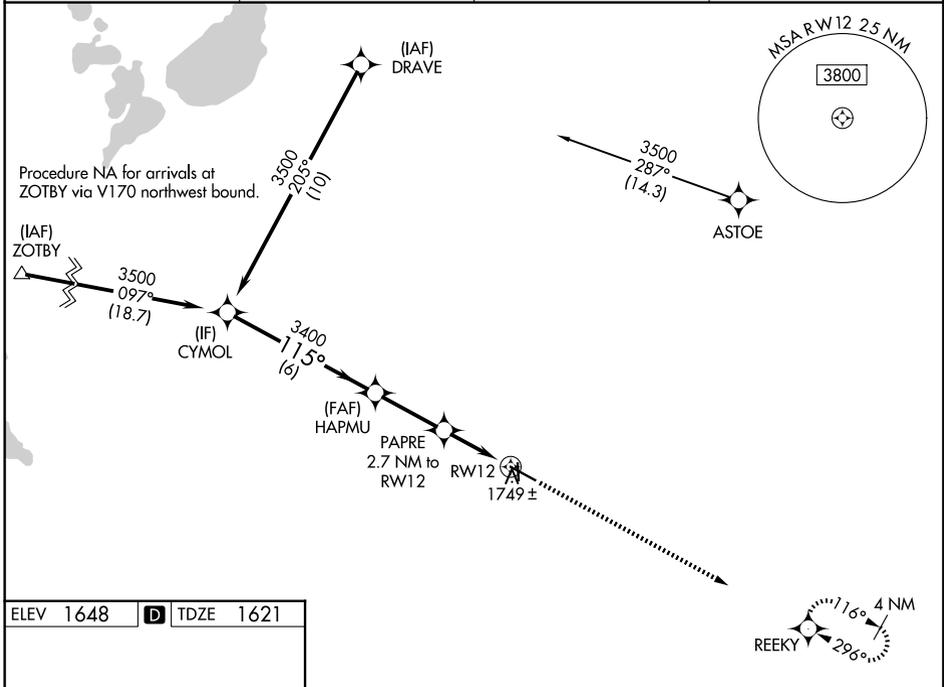

NC-1, 19 FEB 2026 to 19 MAR 2026

NC-1, 19 FEB 2026 to 19 MAR 2026

ELEV 1648	<b>D</b>	TDZE 1621
-----------	----------	-----------

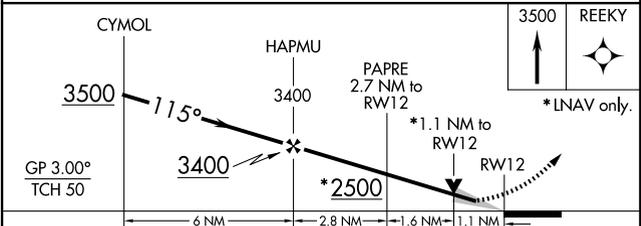

CATEGORY	A	B	C	D
LPV DA	1821-½ 200 (200-½)			
LNAV/VNAV DA	1948-⅝ 327 (300-⅝)			
LNAV MDA	2000-½ 379 (400-½)	2000-⅝ 379 (400-⅝)		
CIRCLING	2140-1 492 (500-1)	2160-1 512 (600-1)	2340-2 692 (700-2)	2340-2¼ 692 (700-2¼)

HIRL Rwy 12-30  
 MIRL Rwy 17-35  
 REIL Rws 17, 30 and 35