




WAAS CH <b>69610</b> <b>W03A</b>	APP CRS <b>030°</b>	Rwy Ldg TDZE Apt Elev	<b>5204</b> <b>700</b> <b>708</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) RWY 3

CLINTON MUNI (CWI)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 2500 direct CUDMA and hold.
<p><b>⚠</b> For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6°C or above 54°C. Baro-VNAV and VDP NA when using DVN altimeter setting. When local altimeter setting not received, use DVN altimeter setting and increase LPV DA to 947 feet; increase LNAV/VNAV DA to 1086 feet and all visibilities 1/8 SM. Increase all MDAs 60 feet and LNAV visibility Cat C 1/8 SM.</p>		

AWOS-3PT <b>125.525</b>	QUAD CITY APP CON* <b>125.95 257.8</b>	UNICOM <b>123.075 (CTAF)</b> <b>📻</b>
----------------------------	---	--

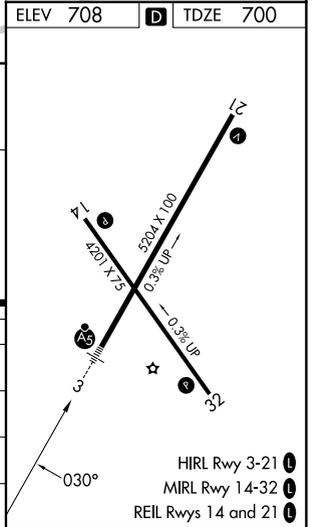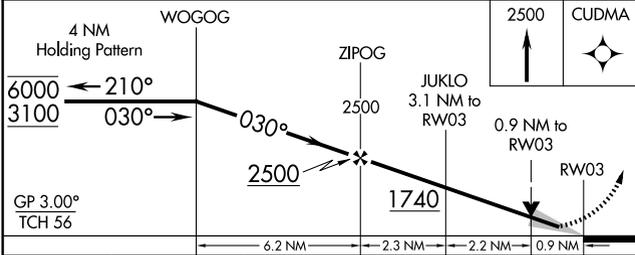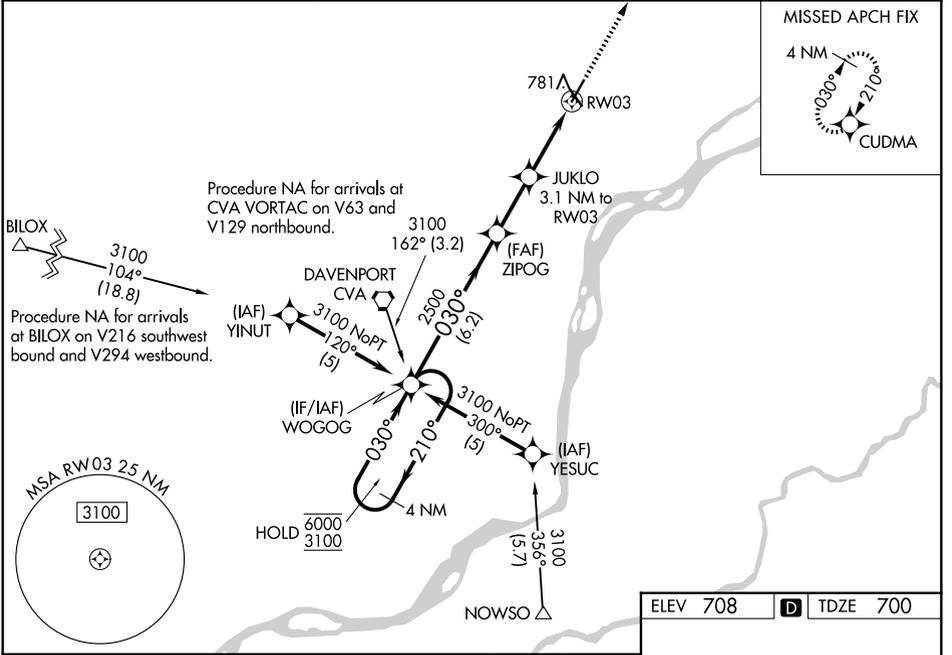

CATEGORY	A	B	C	D
LPV DA	900-1/2	200 (200-1/2)		NA
LNAV/VNAV DA	1039-1/2	339 (400-1/2)		NA
LNAV MDA	1040-1/2	340 (400-1/2)		NA
CIRCLING	1140-1 432 (500-1)	1240-1 532 (600-1)	1240-1 1/2 532 (600-1 1/2)	NA

NC-3, 19 FEB 2026 to 19 MAR 2026

NC-3, 19 FEB 2026 to 19 MAR 2026