

LOC I-AHN	APP CRS	Rwy Ldg	6122
110.95	274°	TDZE	813
		Apt Elev	813


ILS or LOC/DME RWY 27

ATHENS/BEN EPPS (AHN)


⚠ Night landing: Rwy 2, 20 NA. DME from AHN VOR/DME. Simultaneous reception of I-AHN and AHN DME Required. VDP NA with Winder altimeter setting. When local altimeter setting not received, use Winder altimeter setting; increase DA to 1071 feet; increase all MDA 60 feet and S-LOC 27 visibility Cats C and D to 1 SM and Circling Cat D visibility to 2 1/4 SM. For inop MALSf, increase S-LOC 27 all Cats visibility to 1 mile. For inop MALSf when using Winder altimeter setting, increase S-ILS 27 all Cats visibility to 2/3 mile and increase S-LOC 27 Cats A and B visibility to 1 mile, and Cats C and D to 1 1/2 mile. Inop table does not apply to S-ILS 27.

MALSf
 MISSED APPROACH: Climb to 1500 then climbing left turn to 2500 on heading 060° and AHN VOR/DME R-092 to VESTO INT/ AHN 23.6 DME and hold.

ASOS 132.875	ATLANTA APP CON * 132.475 291.1	ATHENS TOWER * 126.3 (CTAF) 0 338.275	GND CON 121.8	UNICOM 122.95
------------------------	---	---	-------------------------	-------------------------

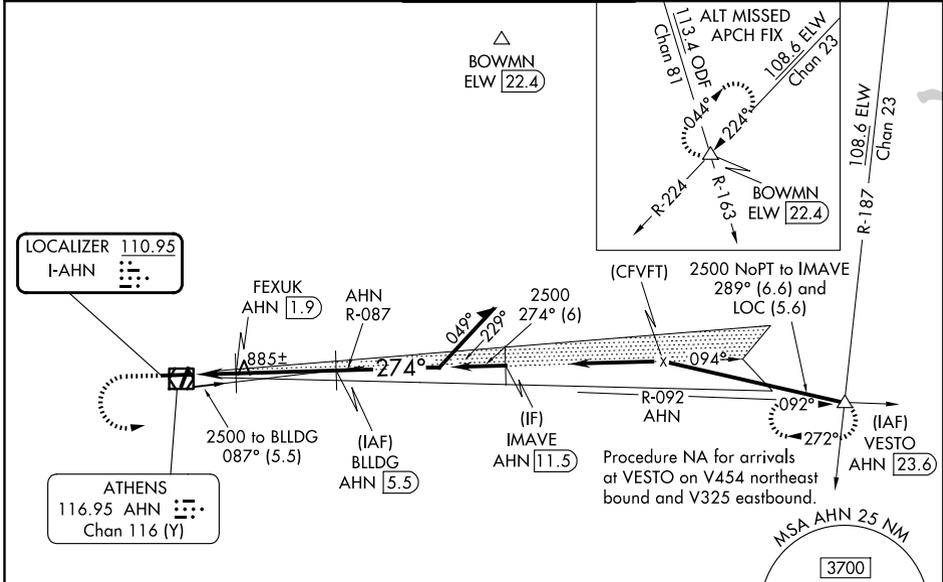

ELEV 813	TDZE 813
----------	----------

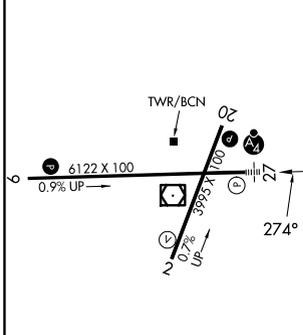

1500	2500	AHN R-092	VESTO	BLLDG AHN 5.5	Remain within 10 NM
* LOC only					
CATEGORY	A	B	C	D	
S-ILS 27	1013-3/4 200 (200-3/4)				
S-LOC 27	1160-3/4 347 (400-3/4)				
CIRCLING	1260-1 447 (500-1)	1280-1 467 (500-1)	1320-1 1/2 507 (600-1 1/2)	1460-2 647 (700-2)	

MIRL Rwy 2-20
HIRL Rwys 9-27

FAF to MAP 5.2 NM

Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

SE-4, 19 FEB 2026 to 19 MAR 2026

SE-4, 19 FEB 2026 to 19 MAR 2026