WAAS CH 45509 W19A	APP CRS 184°	Rwy ldg 5992 TDZE 140 Apt Elev 141

RNAV (GPS) RWY 19
WAYCROSS-WARE COUNTY (AYS)

DME/DME RNP-0.3 NA. Baro-VNAV NA when using Alma altimeter setting. When local altimeter setting not received, use Alma altimeter setting: increase LPV DA to 390 feet and LNAV/VNAV DA to 600 feet and all MDA 60 feet; increase LNAV/VNAV visibility all Cats and LNAV Cat C/D visibility ¼ mile; increase Circling Cat C/D visibility ¼ mile.
For inop MALSR, increase LNAV Cat C/D visibility to 1⅛ mile. For inop MALSR when using Alma altimeter setting increase LNAV/VNAV visibility all Cats to 1½ mile, and LNAV Cat C/D visibility to 1⅜ mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Night landing Rwy 5, 31 NA.

MALSR

MISSED APPROACH: Climb to 1800 direct BAQAV and hold.

AWOS-3	JACKSONVILLE CENTER	UNICOM
118.575	127.575 269.025	122.8 (CTAF) L

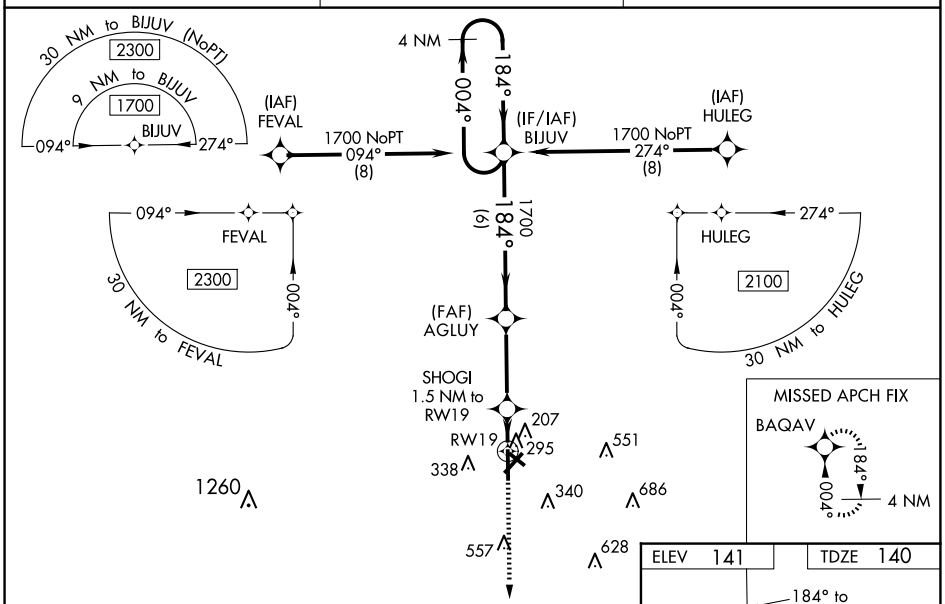

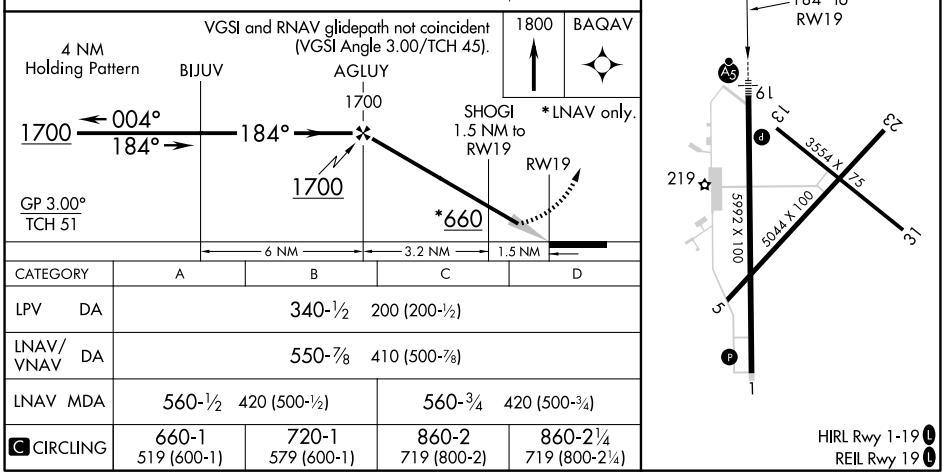

CATEGORY	A	B	C	D
LPV DA	340-½ 200 (200-½)			
LNAV/VNAV DA	550-⅞ 410 (500-⅞)			
LNAV MDA	560-½ 420 (500-½)		560-¾ 420 (500-¾)	
C CIRCLING	660-1 519 (600-1)	720-1 579 (600-1)	860-2 719 (800-2)	860-2¼ 719 (800-2¼)

HIRL Rwy 1-19 L
REIL Rwy 19 L

SE-4, 19 FEB 2026 to 19 MAR 2026

SE-4, 19 FEB 2026 to 19 MAR 2026